WAAS CH **81914** **W26B**	APP CRS **259°**	Rwy Ldg **7005** TDZE **462** Apt Elev **463**

RNAV (GPS) RWY 26L

SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS when using St Louis Lambert Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cat C and D to 1⅜ SM. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 705 feet; increase LNAV/VNAV DA to 959 feet and all visibilities to RVR 5000; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C ¼ SM.

*RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).

MALSR A5


MISSED APPROACH: Climb to 3000 direct JOBRK and hold.

ATIS	ST. LOUIS APP CON	SPIRIT TOWER ★	GND CON	UNICOM
134.8	**126.5 254.3**	**124.75** (CTAF) L **257.2**	**121.7**	**122.95**

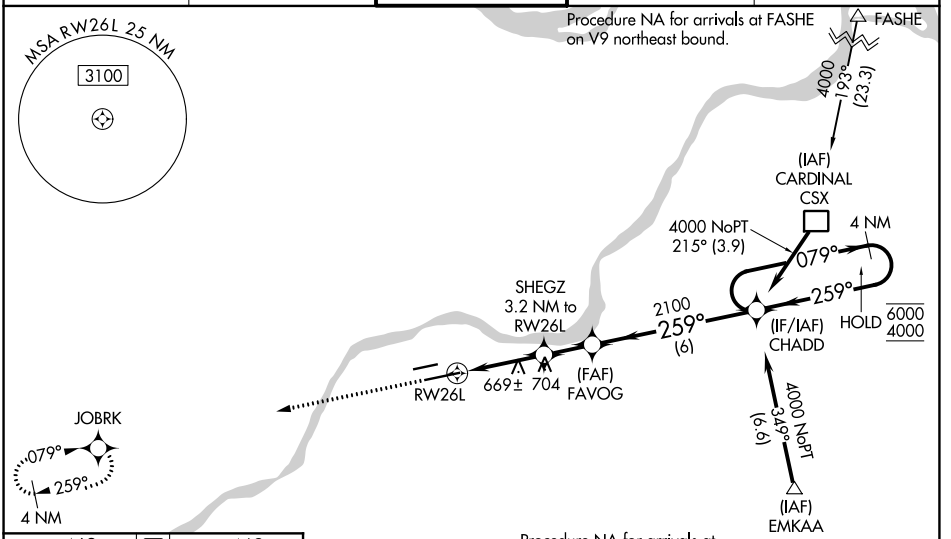

ELEV 463 D TDZE 462



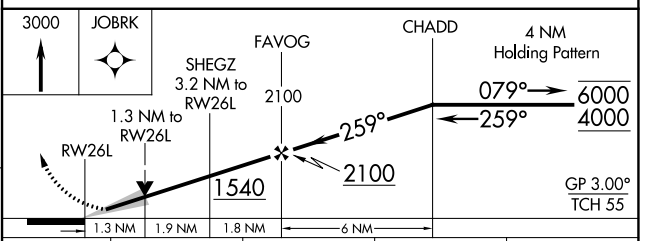

CATEGORY	A	B	C	D
LPV DA*	662/24 200 (200-½)			
LNAV/VNAV DA	916/45 454 (500-⅞)			
LNAV MDA	920/24 458 (500-½)		920/45 458 (500-⅞)	
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)

MIRL Rwy 8L-26R L
HIRL Rwy 8R-26L L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026