RNAV (GPS) RWY 26R

SPIRIT OF ST LOUIS (SUS)

WAAS	APP CRS	Rwy Ldg	5000
CH 97414	259°	TDZE	463
W26A		Apt Elev	463


RNP APCH - GPS.

T A


Baro-VNAV and VDP NA when using STL altimeter setting. Rwy 26R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use STL altimeter setting: increase LPV DA to 798 feet, increase LNAV/VNAV DA to 823 feet; increase all MDAs 60 feet.


MISSED APPROACH: Climb to 3000 direct EXESS and hold.

ATIS	ST. LOUIS APP CON	SPIRIT TOWER ★	GND CON	UNICOM
134.8	126.5 254.3	124.75 (CTAF) L 257.2	121.7	122.95

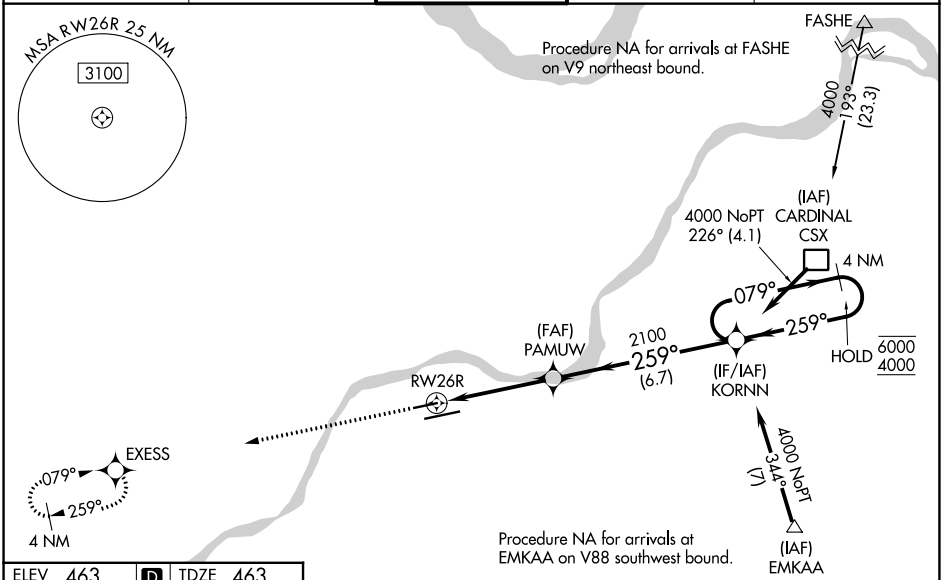

ELEV 463 D TDZ 463



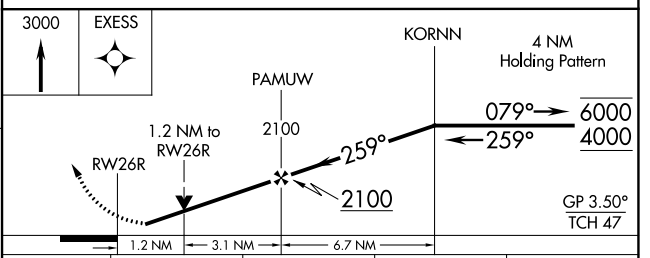

CATEGORY	A	B	C	D
LPV DA	755-1 292 (300-1)		NA	
LNAV/VNAV DA	780-1 317 (400-1)		NA	
LNAV MDA	940-1 477 (500-1)		NA	
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	NA	

MIRL Rwy 8L-26R L
HIRL Rwy 8R-26L L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026