RNAV (GPS) RWY 8R

SPIRIT OF ST LOUIS (SUS)

WAAS CH 61114 W08B	APP CRS 079°	Rwy Ldg 7225 / TDZE 462 / Apt Elev 463


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Baro-VNAV and VDP NA when using STL altimeter setting. When local altimeter setting not received, use STL altimeter setting and increase LPV DA to 719 feet, increase LNAV/VNAV DA to 1186 feet, increase all MDA 60 feet, increase visibility LNAV/VNAV all Cats and LNAV Cats C/D ⅛ SM, and Circling Cat C ¼ SM. For inop ALS, increase LNAV/VNAV all Cats visibility to 2½ SM and LNAV Cats C/D visibility to 1⅝ SM. # RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using STL altimeter setting.


MALSR


MISSED APPROACH: Climb to 3000 direct HUGGE and right turn on track 175° to BNANA and right turn on track 272° to DERDF and hold.

ATIS	ST. LOUIS APP CON	SPIRIT TOWER ★	GND CON	UNICOM
134.8	126.5 254.3	124.75 (CTAF) L 257.2	121.7	122.95

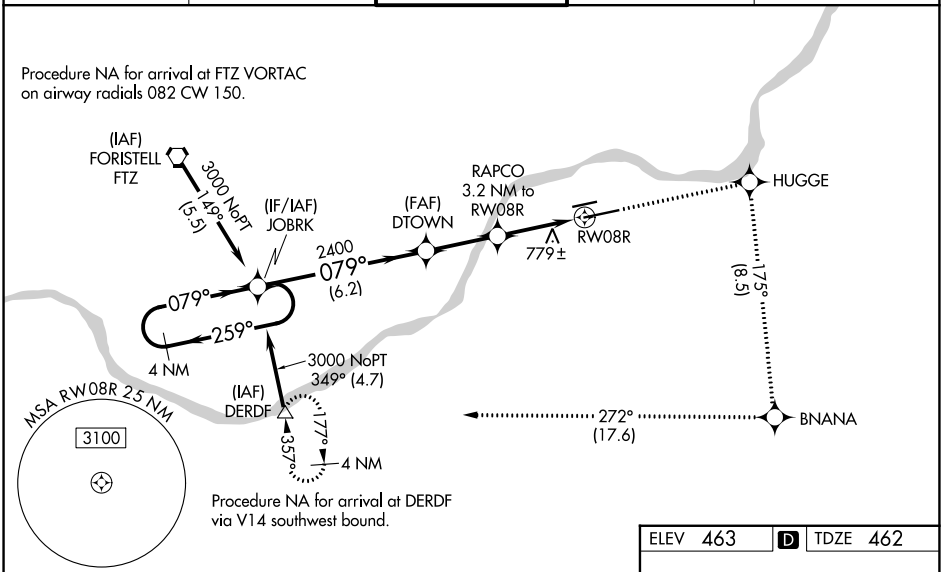

ELEV 463 D TDZE 462

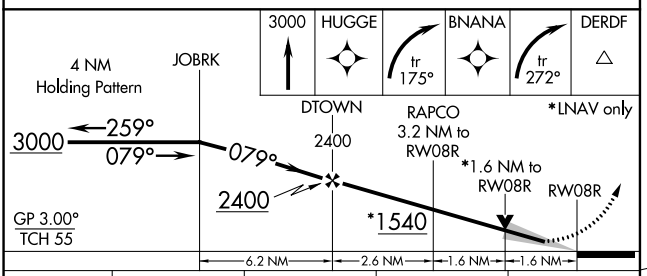



CATEGORY	A	B	C	D
LPV DA#	662/24 200 (200-½)			
LNAV/VNAV DA	1129-1⅞ 667 (700-1⅞)			
LNAV MDA	1040/24 578 (600-½)		1040-1¼ 578 (600-1¼)	
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)

MIRL Rwy 8L-26R L
HIRL Rwy 8R-26L L

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026