RNAV (GPS) RWY 22


ROCKWOOD MUNI (RKW)

WAAS	APP CRS	Rwy Ldg	5000
CH 61126	224°	TDZE	1662
W22A		Apt Elev	1664

T
A NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 33°C (91°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crossville altimeter setting; increase LPV DA to 1987 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 2011 feet and visibility all Cats ¼ SM; increase all MDA 80 feet and increase LNAV Cat C and D visibility ¼ SM and Circling Cat C visibility ½ SM. Baro-VNAV NA when using Crossville altimeter setting.

MISSED APPROACH: Climb to 5300 direct CUTUK and hold, continue climb-in-hold to 5300.

AWOS-3	ATLANTA CENTER	UNICOM
118.775	133.6 254.3	122.8 (CTAF) L

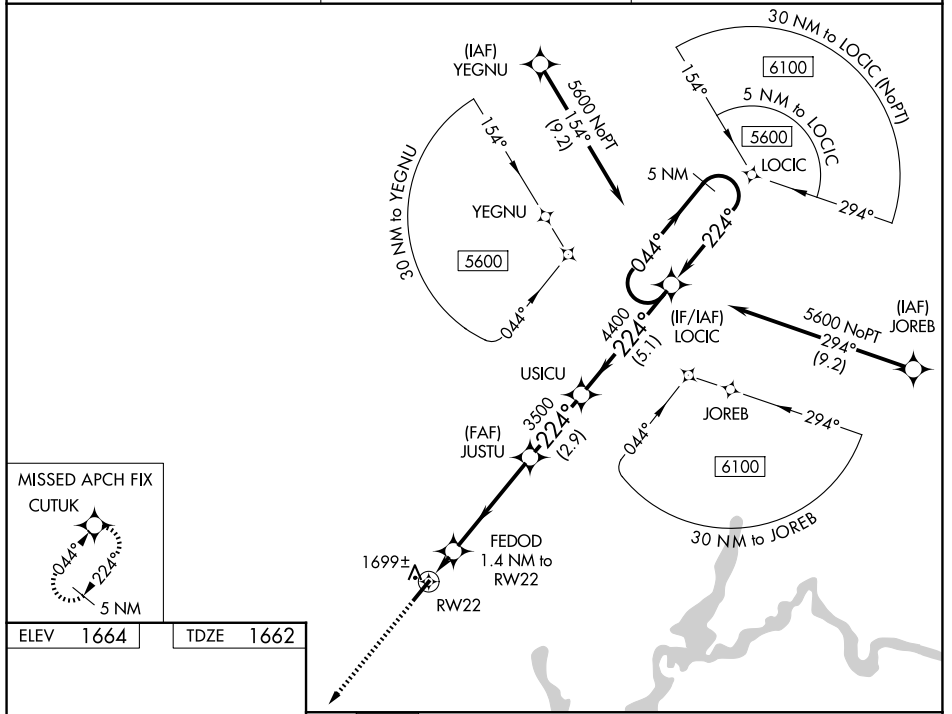

CATEGORY	A	B	C	D
LPV DA		1912-⅞	250 (300-⅞)	
LNAV/VNAV DA		1936-⅞	274 (300-⅞)	
LNAV MDA		1980-1	318 (400-1)	
CIRCLING	2100-1 436 (500-1)	2200-1 536 (600-1)	2260-1½ 596 (600-1½)	2780-3 1116 (1200-3)

MIRL Rwy 4-22 L
REIL Rwys 4 and 22 L

SE-1, 29 OCT 2026 to 26 NOV 2026