RNAV (GPS) RWY 7L

KENOSHA RGNL (ENW)

WAAS CH 50314 W07A	APP CRS 066°	Rwy Ldg 6600 TDZE 742 Apt Elev 742


RNP APCH - GPS.


Circling Rwy 7R, 15 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅛ SM.

MALSR


MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct DIKHU and hold.

ATIS	MILWAUKEE APP CON	KENOSHA TOWER ★	GND CON	UNICOM
127.175	135.875 317.725	118.6 L (CTAF) 353.6	121.875	122.95

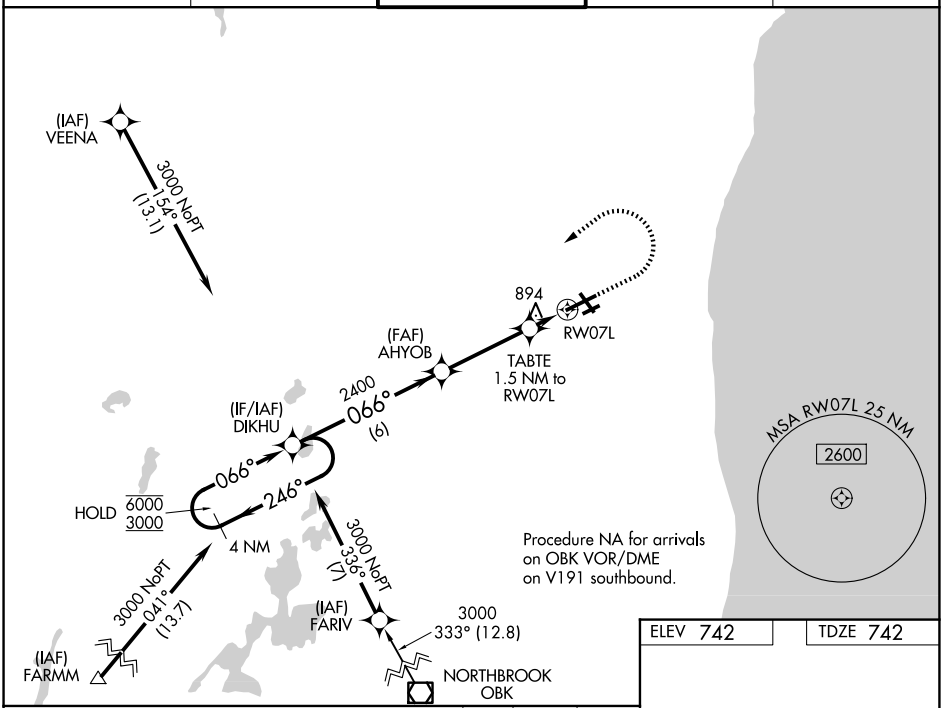

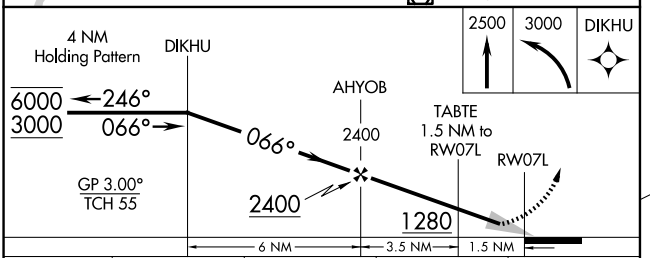

ELEV 742 TDZE 742



CATEGORY	A	B	C	D
LPV DA	942-½ 200 (200-½)			
LNAV/VNAV DA	1181-¾ 439 (500-¾)			
LNAV MDA	1160-½ 418 (500-½)		1160-¾ 418 (500-¾)	
CIRCLING	1200-1 458 (500-1)	1340-1 598 (600-1)	1400-1¾ 658 (700-1¾)	1440-2¼ 698 (700-2¼)

MIRL Rwy 7R-25L L
HIRL Rwys 7L-25R and 15-33 L
REIL Rwys 15, 25R, and 33 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026