LIDDS FOUR DEPARTURE (RNAV)

(LIDDS4.LIDDS) 17APR25


ANN ARBOR, MICHIGAN
ANN ARBOR MUNI (ARB)


TOP ALTITUDE: ASSIGNED BY ATC

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.
RADAR required for non-GPS equipped aircraft.


DETROIT DEP CON
118.95 284.0
ATIS
134.55
CLNC DEL
121.6
GND CON
121.6
ANN ARBOR TOWER ★
120.3 (CTAF)

TAKEOFF MINIMUMS:
Rwys 12, 30: NA - Environmental.
Rwys 6, 24: Standard.





NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

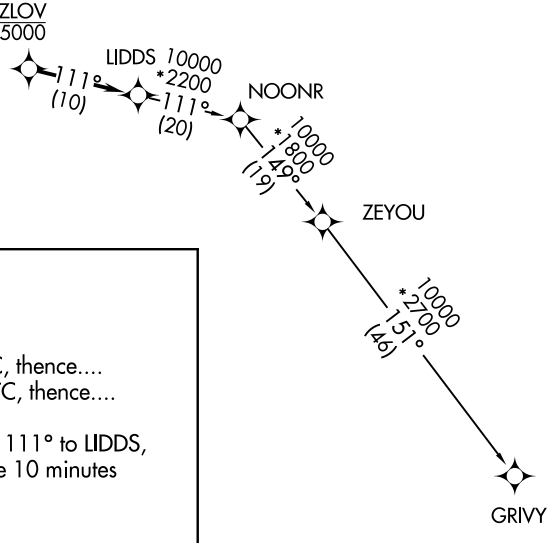

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 6: Climb on heading 060° or as assigned by ATC, thence....
TAKEOFF RUNWAY 24: Climb on heading 240° or as assigned by ATC, thence....

....for RADAR vectors to cross KZLOV at or below 15000, then on track 111° to LIDDS, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

GRIVY TRANSITION (LIDDS4.GRIVY):

NOTE: Chart not to scale.

LIDDS FOUR DEPARTURE (RNAV)

(LIDDS4.LIDDS) 25107

AL-5506 (FAA)

ANN ARBOR, MICHIGAN
ANN ARBOR MUNI (ARB)