| WAAS CH 93513 W01A | APP CRS 010° | Rwy Idg 6604 TDZE 87 Apt Elev 91 |
|---|---|---|


# RNAV (GPS) RWY 1


## H L SONNY CALLAHAN (CQF)

Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 329 feet, LNAV/VNAV DA to 517 feet, and all MDA 60 feet; increase LNAV Cats C/D visibility 1/8 SM and Circling Cats C/D 1/4 SM.


MISSED APPROACH: Climb to 700 then climbing left turn to 2000 direct BFM VORTAC and hold.

| AWOS-3PT | MOBILE APP CON ★ | UNICOM |
|---|---|---|
| 118.425 | 118.5 269.3 | 123.0 (CTAF) L |

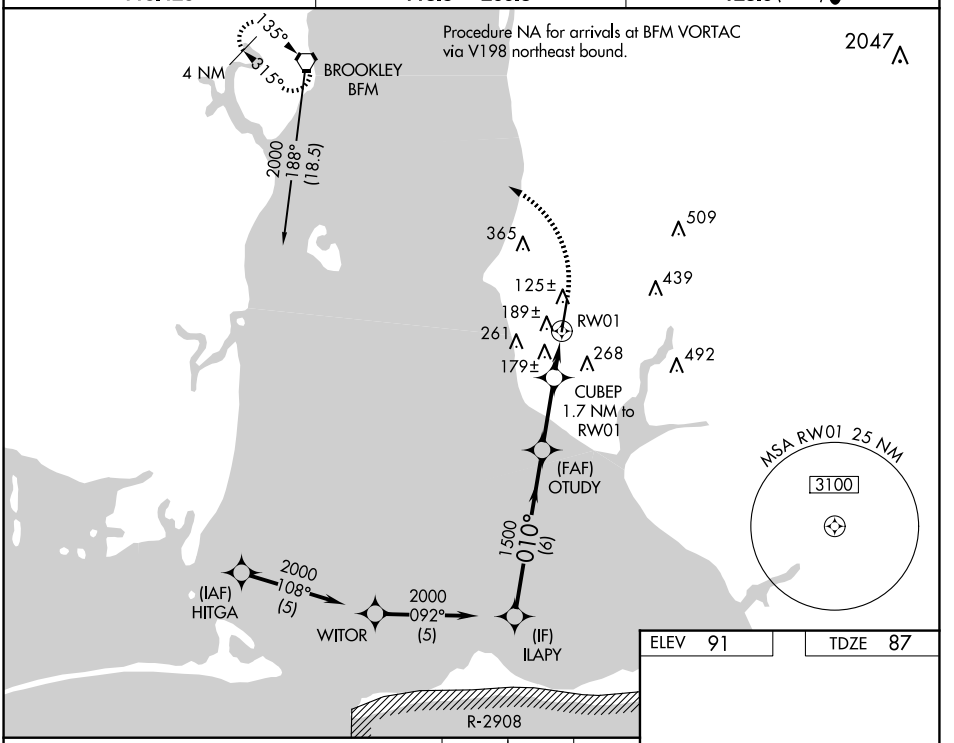

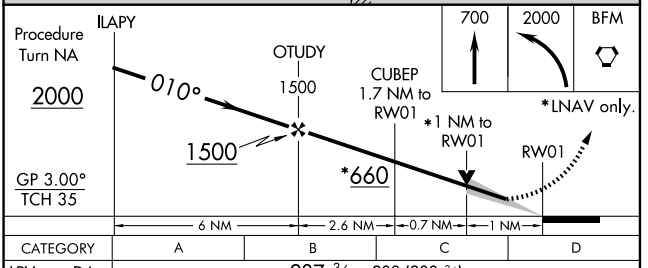
| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 287-¾ | 200 (200-¾) | | |
| LNAV/VNAV DA | 475-1⅜ | 388 (400-1⅜) | | |
| LNAV MDA | 440-1 | 353 (400-1) | | |
| CIRCLING | 560-1 469 (500-1) | 580-1 489 (500-1) | 720-1¾ 629 (700-1¾) | 740-2 649 (700-2) |



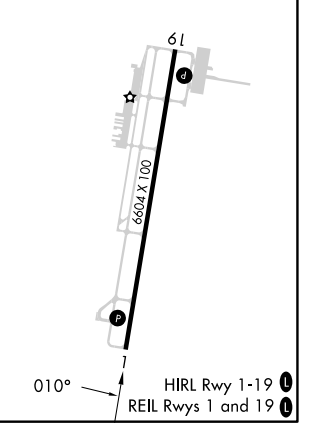


SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026