WAAS	APP CRS	Rwy Idg	6604
CH 99313	190°	TDZE	91
W19A		Apt Elev	91


RNAV (GPS) RWY 19


H L SONNY CALLAHAN (CQF)


Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT	MOBILE APP CON ★	UNICOM
118.425	118.5 269.3	123.0 (CTAF) L

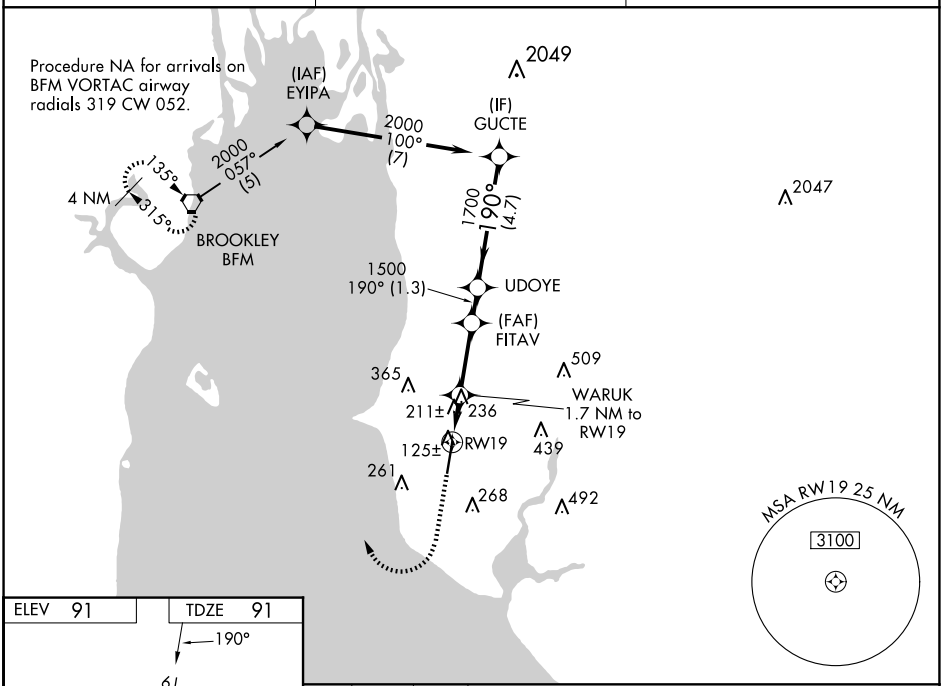

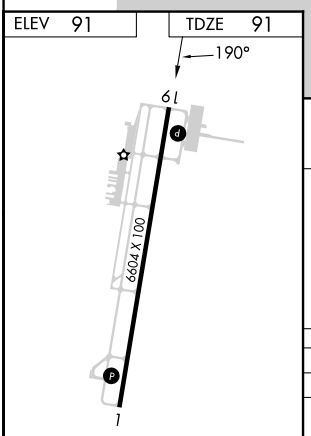

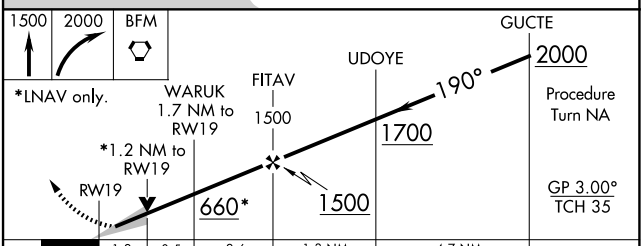

CATEGORY	A	B	C	D
LPV DA	341-⅞ 250 (300-⅞)			
LNAV/VNAV DA	513-1½ 422 (500-1½)			
LNAV MDA	500-1 409 (500-1)		500-1⅛ 409 (500-1⅛)	
CIRCLING	560-1 469 (500-1)	580-1 489 (500-1)	720-1¾ 629 (700-1¾)	740-2 649 (700-2)

HIRL Rwy 1-19 L
REIL Rwys 1 and 19 L

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026