| LOC I-UCY | APP CRS | Rwy Ldg | 6503 |
|---|---|---|---|
| 109.7 | 006° | TDZE | 346 |
| | | Apt Elev | 346 |

# ILS or LOC RWY 1
## EVERETT-STEWART RGNL (UCY)


T
A NA

ADF required. When local altimeter setting not received, use Dyersburg altimeter setting and increase all DA 72 feet and all MDA 80 feet, increase S-LOC 1 Cat C/D visibility to 1⅜ mile, Circling Cat C visibility to 1⅝ mile and Circling Cat D visibility to 2½ mile. Inop table does not apply to S-ILS 1. For inop ODALS, increase S-LOC 1 Cat C/D visibility to 1⅜ mile. For inop ODALS when using Dyersburg altimeter setting, increase S-ILS 1 all Cats visibility to ⅞ mile and S-LOC 1 Cat D visibility to 1⅜ mile.


ODALS

MISSED APPROACH: Climb to 1300 then climbing right turn to 2500 direct OBION LOM and hold.


| AWOS-3 | MEMPHIS CENTER | UNICOM |
|---|---|---|
| 135.325 | 133.65 292.15 | 122.7 (CTAF) L |

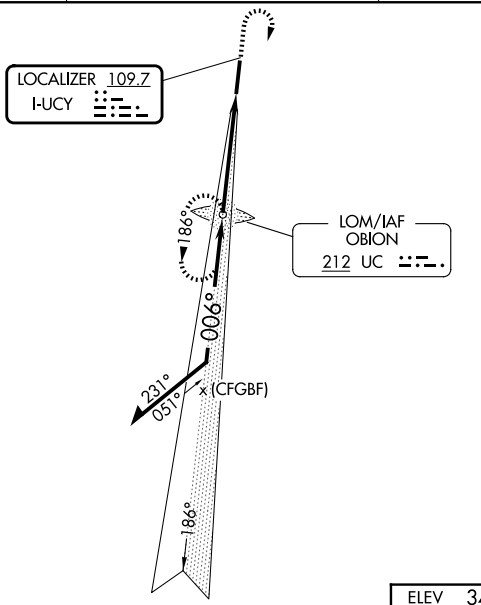


ADF and RADAR REQUIRED

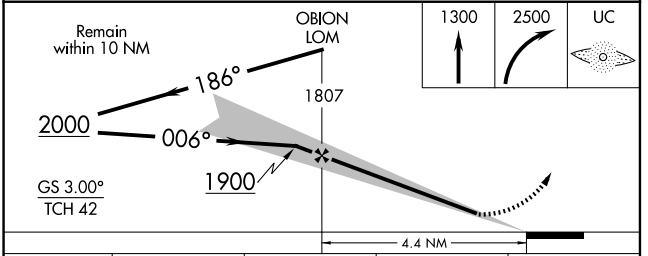


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 1 | 546-¾ 200 (200-¾) | | | |
| S-LOC 1 | 820-¾ 474 (500-¾) | | 820-1¼ 474 (500-1¼) | |
| CIRCLING | 820-1 474 (500-1) | | 820-1½ 474 (500-1½) | 1020-2¼ 674 (700-2¼) |

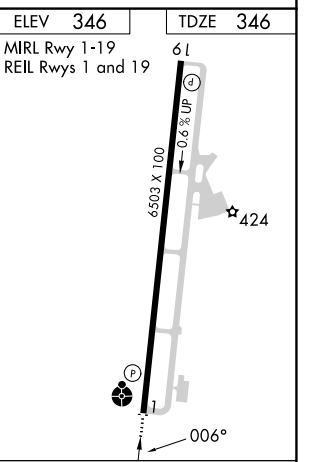


| FAF to MAP 4.4 NM | | | | | | |
|---|---|---|---|---|---|---|
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 4:24 | 2:56 | 2:12 | 1:46 | 1:28 |



SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026