WAAS CH 69532 W10A	APP CRS 103°	Rwy Ldg 5006 TDZE 897 Apt Elev 906

RNAV (GPS) RWY 10


L O SIMENSTAD MUNI (OEO)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using Anoka County/Blaine (Janes Fld) altimeter setting. When local altimeter setting not received, use Anoka County/Blaine (Janes Fld) altimeter setting: increase LPV DA to 1204 feet and visibility all Cats ⅛ SM; increase LNAV/VNAV DA to 1247 feet and visibility all Cats ¼ SM; increase all MDAs 60 feet and visibility LNAV Cat C ⅛ SM and Circling Cat C ¼ SM. Rwy 10 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 4 and 22.

MISSED APPROACH: Climb to 3000 direct ECLEY and hold.


AWOS-3	MINNEAPOLIS APP CON	CTAF
119.925	121.2 335.65	122.9 L

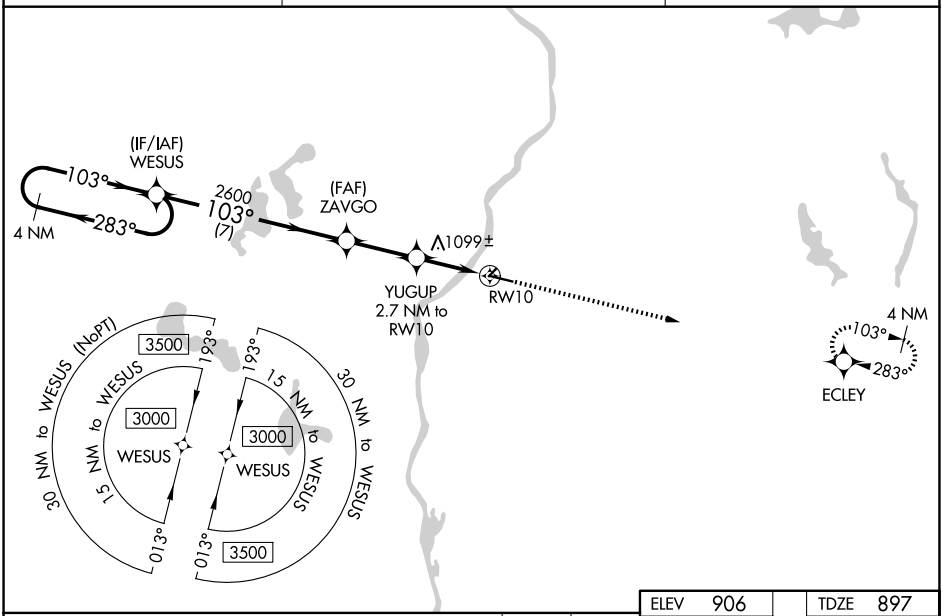

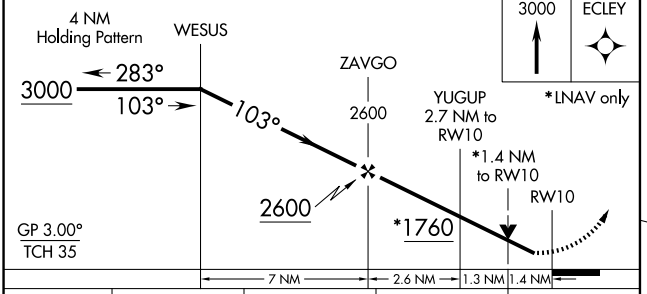

CATEGORY	A	B	C	D
LPV DA	1147-⅞ 250 (300-⅞)			NA
LNAV/VNAV DA	1190-1 293 (300-1)			NA
LNAV MDA	1360-1 463 (500-1)		1360-1⅜ 463 (500-1⅜)	NA
CIRCLING	1360-1 454 (500-1)	1500-1 594 (600-1)	1520-1¾ 614 (700-1¾)	NA

ELEV 906 TDZE 897



REIL Rwy 28 L
MIRL Rwys 10 and 28 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026