RNAV (GPS) RWY 16


CARROLL COUNTY RGNL/JACK B POAGE FLD (DMW)


WAAS	APP CRS	Rwy Idg	5100
CH 65607	159°	TDZE	789
W16A		Apt Elev	789

Baro-VNAV NA when using Frederick altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). When local altimeter setting not received, use Frederick altimeter setting and increase LPV DA to 1199 feet, LNAV/VNAV DA to 1307 feet, and all MDAs 120 feet; increase LPV all Cats visibility ⅛ SM, LNAV Cat C visibility ⅜ SM, and Circling Cat C visibility ½ SM. When VGSI inop, Straight-in/Circling Rwy 16 procedure NA at night. DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA.


MISSED APPROACH: Climb to 2200 direct NABIC then climbing left turn to 3000 on track 070° to FIGID and hold.

AWOS-3	POTOMAC APP CON	GCO	UNICOM
121.25	125.525 291.625	121.725	122.7 (CTAF) L

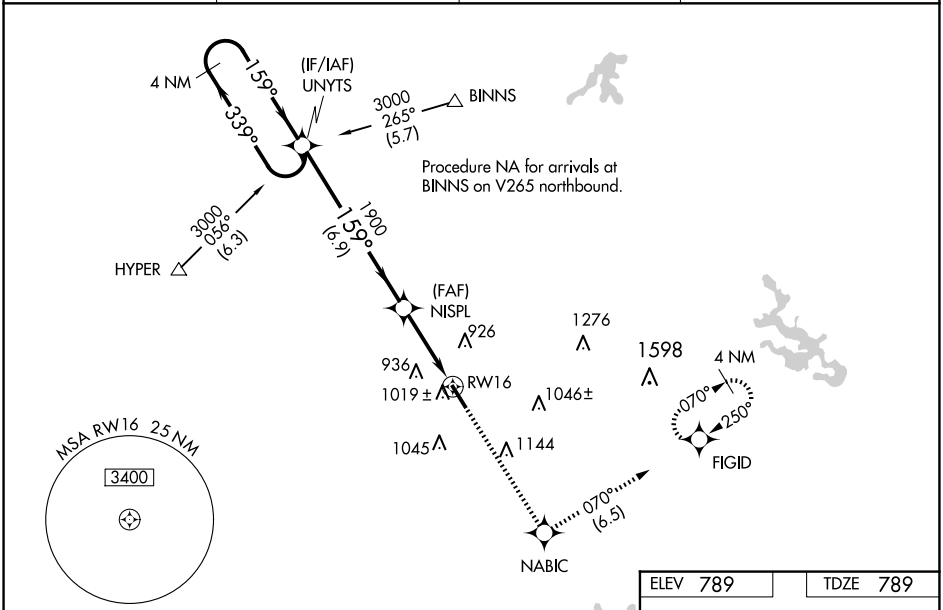

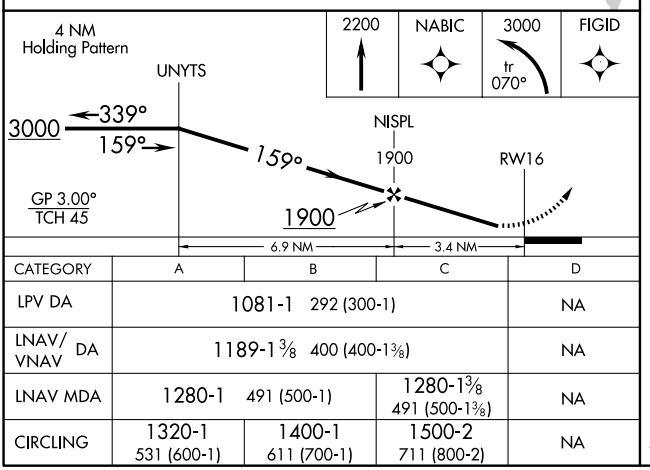

CATEGORY	A	B	C	D
LPV DA	1081-1 292 (300-1)			NA
LNAV/VNAV DA	1189-1⅜ 400 (400-1⅜)			NA
LNAV MDA	1280-1 491 (500-1)		1280-1⅜ 491 (500-1⅜)	NA
CIRCLING	1320-1 531 (600-1)	1400-1 611 (700-1)	1500-2 711 (800-2)	NA

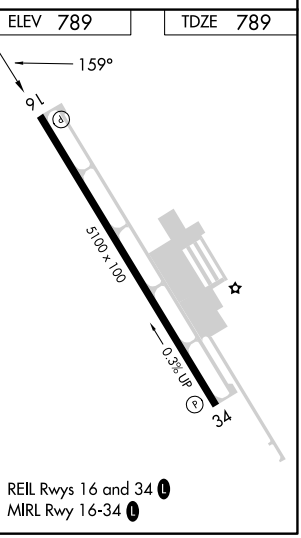

REIL Rwys 16 and 34 L
MIRL Rwy 16-34 L

NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026