# RNAV (GPS) RWY 35

SUGAR LAND RGNL (SGR)


| WAAS | APP CRS | | |
|---|---|---|---|
| CH 56219 | 350° | Rwy Ldg | 6016 |
| W35A | | TDZE | 78 |
| | | Apt Elev | 82 |

RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). Baro-VNAV and VDP NA when using William P Hobby altimeter setting. When local altimeter setting not received, use William P Hobby altimeter setting: increase all DA 51 feet; increase all MDA 60 feet and increase LNAV-VNAV all Cats visibility to 1¾, LNAV Cat C/D visibility to 1⅞, and Circling Cat C visibility to 2, Cat D to 2¼. When VGSI inop, Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 2000 direct UPAQI and on track 019° to DREWZ and hold.


| D-ATIS | HOUSTON APP CON | SUGAR LAND TOWER ★ | GND CON | UNICOM |
|---|---|---|---|---|
| 118.125 | 123.8 257.7 | 118.65 (CTAF) L | 121.4 | 122.95 |

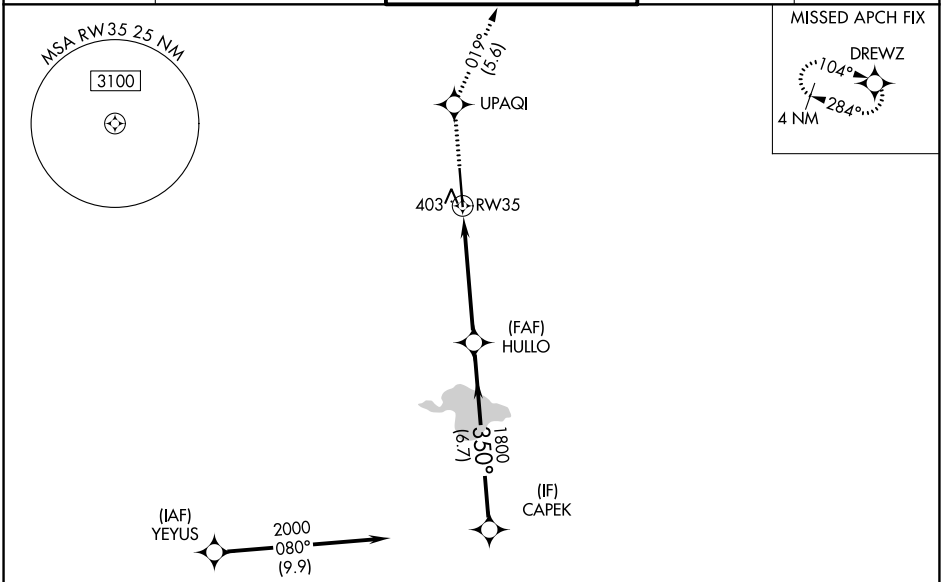


RADAR REQUIRED

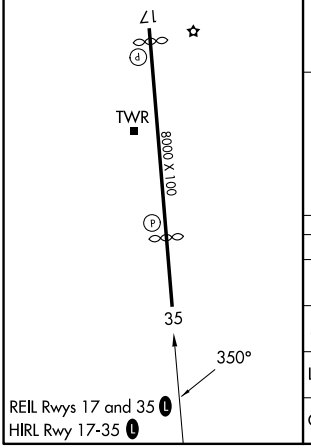


ELEV 82 TDZE 78

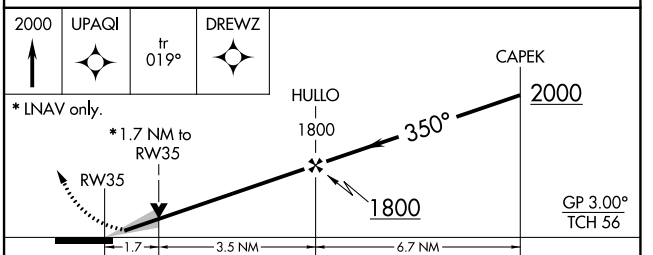


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 278-¾ 200 (200-¾) | | | |
| LNAV/VNAV DA | 567-1⅝ 489 (500-1⅝) | | | |
| LNAV MDA | 660-1 582 (600-1) | | 660-1¾ 582 (600-1¾) | |
| CIRCLING | 720-1 638 (700-1) | | 720-1¾ 638 (700-1¾) | 720-2 638 (700-2) |



SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026