LOC I-RUQ	APP CRS	Rwy Ldg	5501
109.95	202°	TDZE	772
		Apt Elev	772

ILS or LOC RWY 20
MID-CAROLINA RGNL (RUQ)


T ANA ADF required. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase S-LOC Cats C/D visibility ⅛ SM and Circling Cat D visibility ¼ SM. For inop ALS when using Lexington altimeter setting, increase S-LOC 20 Cats C and D visibility to 1¾ mile.


MALSR

MISSED APPROACH: Climb to 1600 then climbing right turn to 2900 direct ROVDY LOM and hold.


AWOS-3P	CHARLOTTE APP CON	UNICOM
118.175	128.325 307.8	122.725 (CTAF) L

ADF REQUIRED

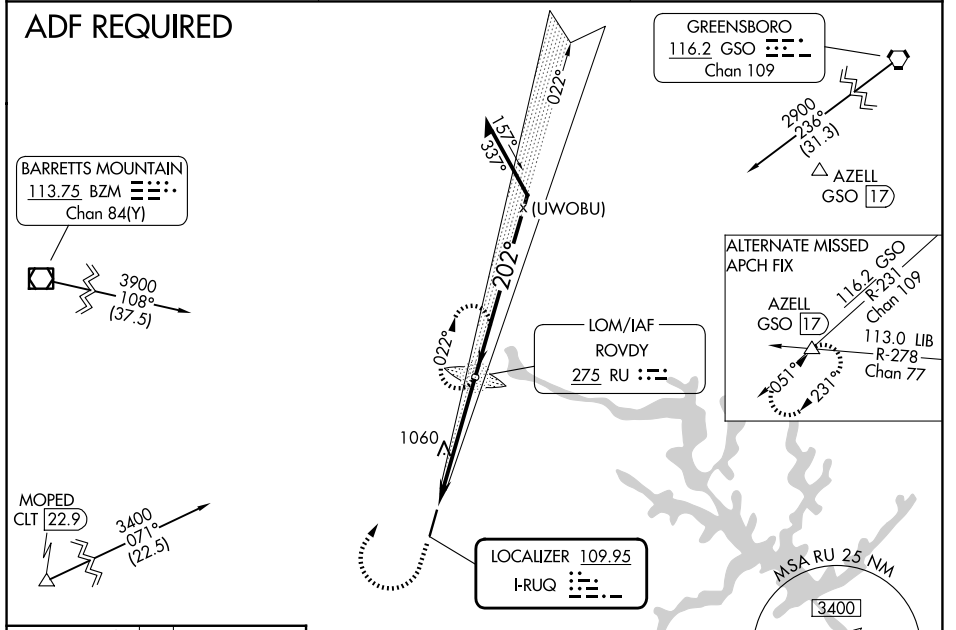

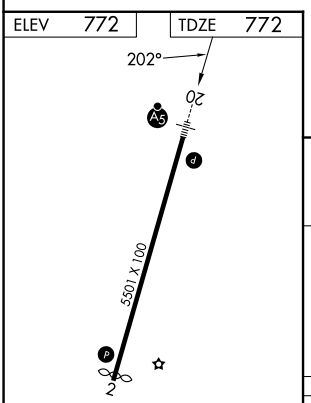

FAF to MAP 5 NM					
Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

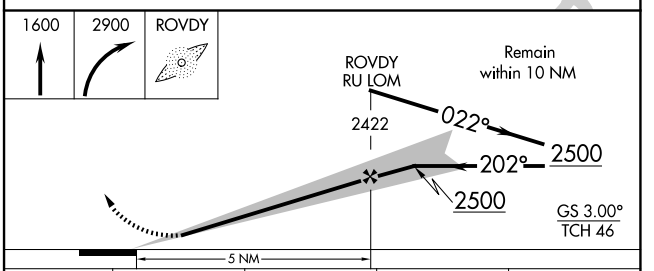

CATEGORY	A	B	C	D
S-ILS 20	972-½ 200 (200-½)			
S-LOC 20	1360-½ 588 (600-½)		1360-1¼ 588 (600-1¼)	
CIRCLING	1360-1 588 (600-1)		1440-1¾ 668 (700-1¾)	1440-2 668 (700-2)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026