RNAV (GPS) RWY 20

MID-CAROLINA RGNL (RUQ)


WAAS	APP CRS	Rwy Ldg	5501
CH 42521	202°	TDZE	772
W20A		Apt Elev	772


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16° C (4°F) or above 39°C (102°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet, increase LNAV Cat C and D visibility ⅛ SM and Circling Cat C visibility ⅛ SM and Circling Cat D 1¼ SM. For inop ALS when using Lexington altimeter setting, increase LNAV Cat C and D visibility to 1¾ SM. VDP and Baro-VNAV NA when using Lexington altimeter setting. For inop ALS, increase LNAV/VNAV visibility to ⅞ SM all Cats.


MALSR

MISSED APPROACH: Climb to 2100 then climbing right turn to 3400 direct YIDPO and hold.

AWOS-3P	CHARLOTTE APP CON	UNICOM
118.175	128.325 307.8	122.725 (CTAF) L

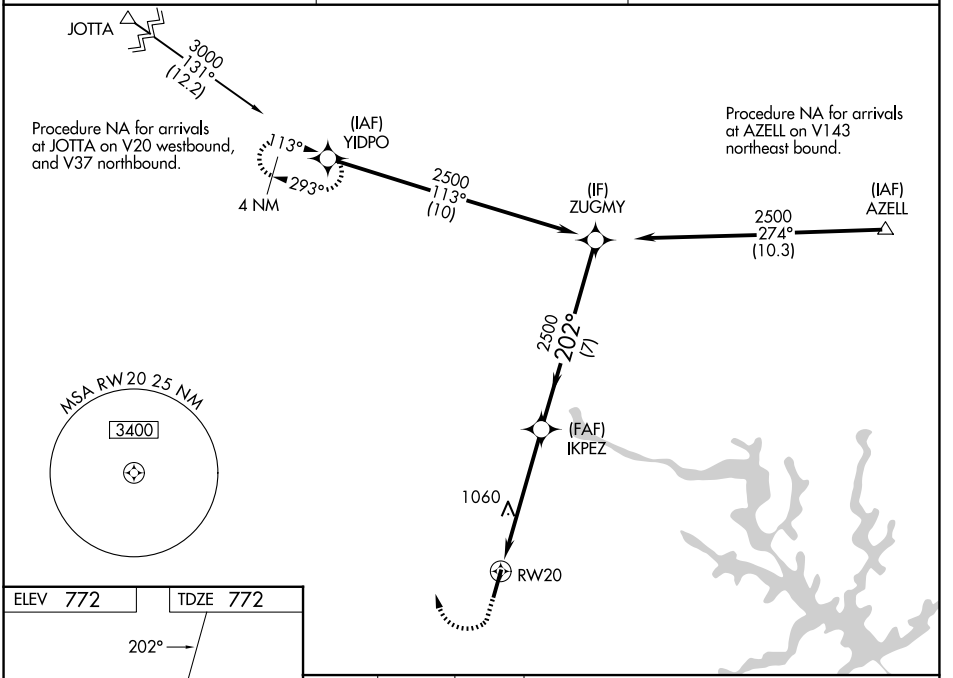

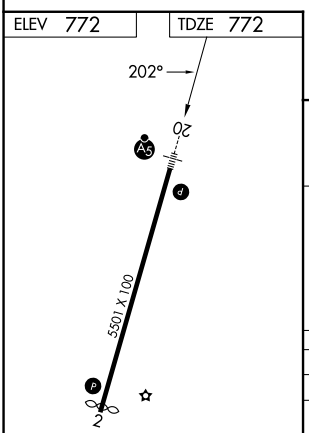

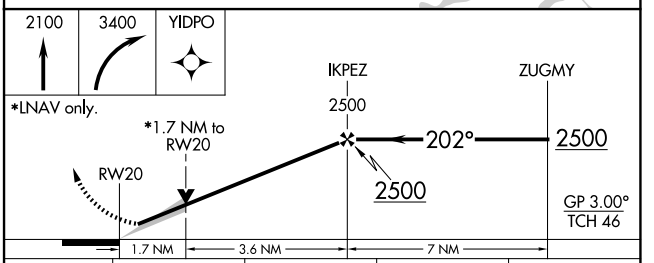

CATEGORY	A	B	C	D
LPV DA	972-½ 200 (200-½)			
LNAV/VNAV DA	1032-½ 260 (300-½)			
LNAV MDA	1360-½ 588 (600-½)		1360-1¼ 588 (600-1¼)	
CIRCLING	1360-1 588 (600-1)		1440-1¾ 668 (700-1¾)	1440-2 668 (700-2)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026