WAAS	APP CRS	Rwy Ldg	5201
CH 90137	153°	TDZE	3432
W17B		Apt Elev	3459

RNAV (GPS) Y RWY 17


BEND MUNI (BDN)


RNP APCH - GPS.

VDP NA when using RDM altimeter setting. When local altimeter setting not received, use RDM altimeter setting and increase all MDAs 100 feet and LP visibility Cats C and D ⅜ SM, LNAV visibility Cats C and D ¼ SM, and Circling visibility Cat C ½ SM.


MISSED APPROACH: Climb to 7400 direct HITUP and on track 064° to REMTE and hold, continue climb-in-hold to 7400.

AWOS-3	SEATTLE CENTER	UNICOM
134.425	126.15 269.475	123.0 (CTAF) L

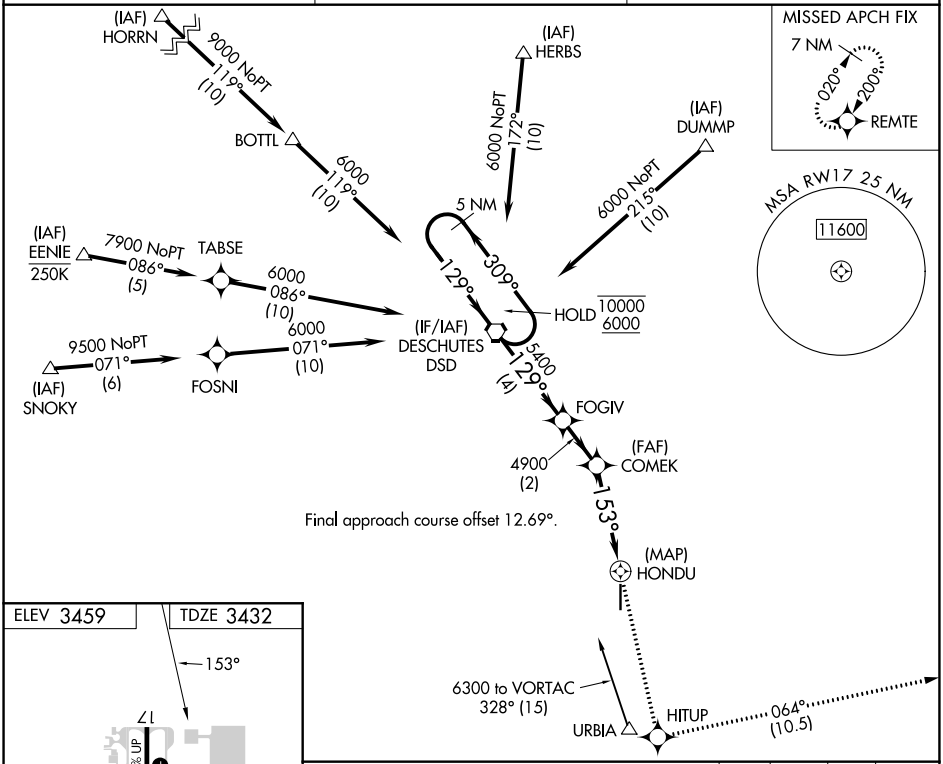

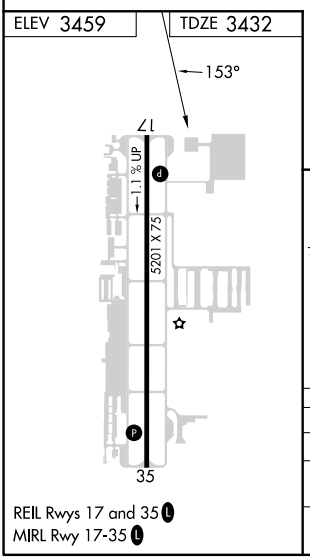

REIL Rwys 17 and 35 L
MIRL Rwy 17-35 L

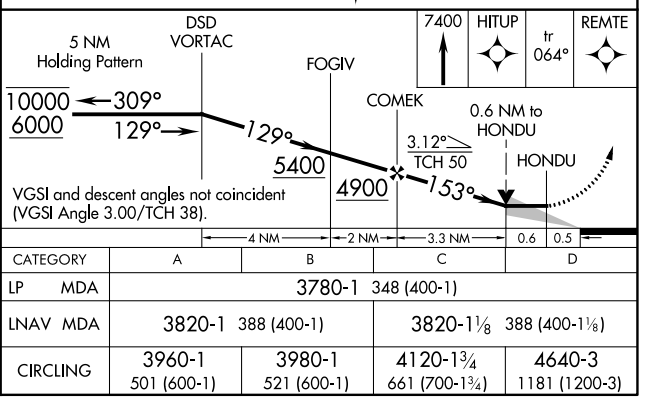

CATEGORY	A	B	C	D
LP MDA	3780-1 348 (400-1)			
LNAV MDA	3820-1 388 (400-1)		3820-1⅛ 388 (400-1⅛)	
CIRCLING	3960-1 501 (600-1)	3980-1 521 (600-1)	4120-1¾ 661 (700-1¾)	4640-3 1181 (1200-3)

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026