VORTAC DSD	APP CRS	Rwy Ldg	5201
117.6	136°	TDZE	3432
Chan 123		Apt Elev	3459


VOR RWY 17
BEND MUNI (BDN)


DME required.

Rwy 17 helicopter visibility reduction below ¾ SM NA. VDP NA when using RDM altimeter setting. When local altimeter setting not received, use RDM altimeter setting and increase all MDAs 100 feet and increase S-17 visibility Cats C and D ¼ SM, and Circling visibility Cat C ½ SM.


MISSED APPROACH: Climb to 4700 then climbing right turn to 7000 direct DSD VORTAC and hold, continue climb-in-hold to 7000.

AWOS-3	SEATTLE CENTER	UNICOM
134.425	126.15 269.475	123.0 (CTAF) L

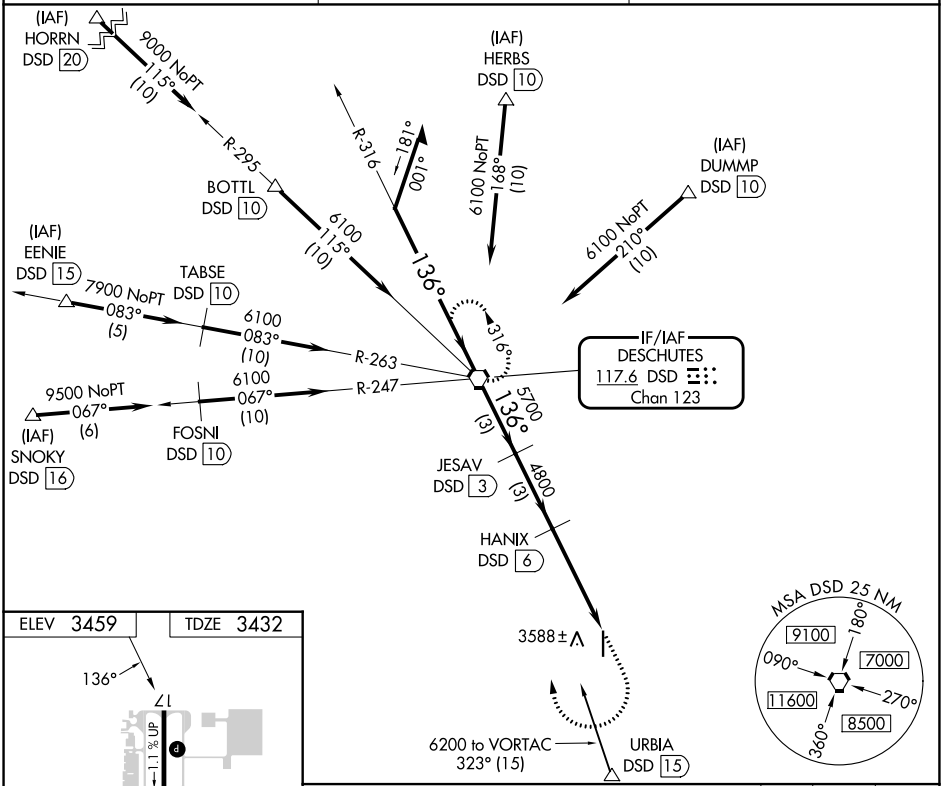

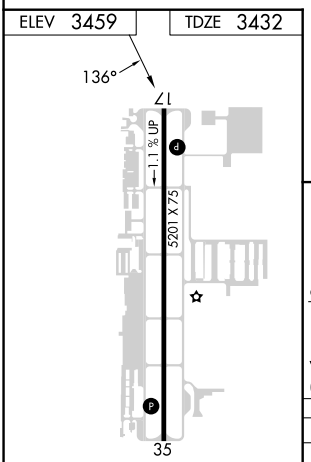

REIL Rwys 17 and 35 L
MIRL Rwy 17-35 L

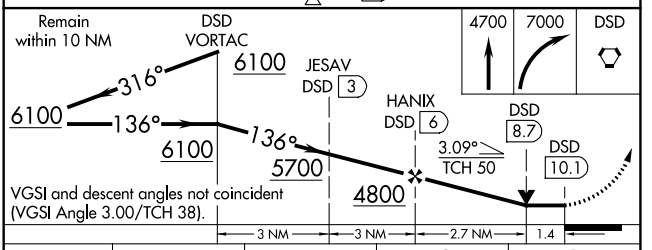

CATEGORY	A	B	C	D
S-17	3880-1 448 (500-1)		3880-1⅜ 448 (500-1⅜)	
CIRCLING	3960-1 501 (600-1)	3980-1 521 (600-1)	4120-1¾ 661 (700-1¾)	4640-3 1181 (1200-3)

NW-1, 29 OCT 2026 to 26 NOV 2026
NW-1, 29 OCT 2026 to 26 NOV 2026