# RNAV (GPS) RWY 25

WILLIAMS COUNTY (ØG6)

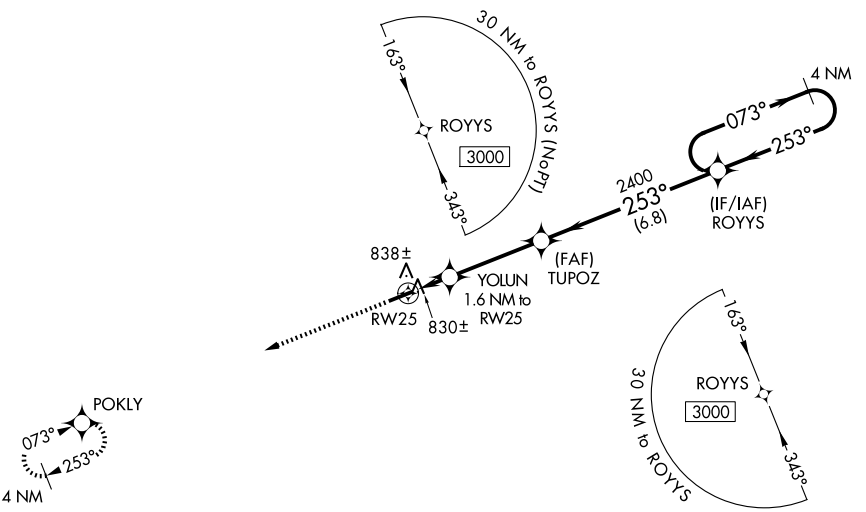
| WAAS | APP CRS | Rwy Ldg | 4153 |
|---|---|---|---|
| CH 40427 | 253° | TDZE | 730 |
| W25A | | Apt Elev | 730 |


When VGSI inop, Straight-in/Circling Rwy 25 procedure NA at night. DME/DME RNP-0.3 NA. Helicopter visibility reduction below 1 SM NA. Use Defiance Meml altimeter setting; when not received, use Auburn/Dekalb Exec altimeter setting: increase all MDAs 60 feet and LP and LNAV and Circling visibility Cats C/D ¼ SM.

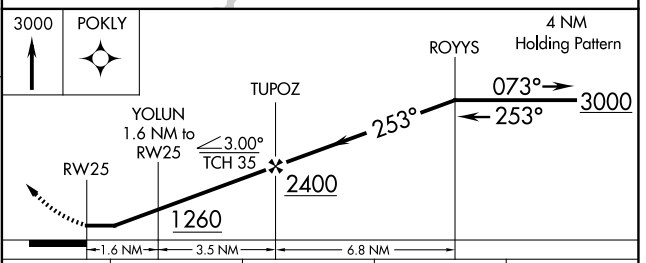
NA

MISSED APPROACH: Climb to 3000 direct POKLY and hold.

| DFI ASOS | TOLEDO APP CON | UNICOM | |
|---|---|---|---|
| 121.425 | 134.35 307.0 | 122.8 (CTAF) | 123.0 L |




| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LP MDA | 1120-1 | 390 (400-1) | 1120-1⅛ | 390 (400-1⅛) |
| LNAV MDA | 1140-1 | 410 (500-1) | 1140-1⅛ | 410 (500-1⅛) |
| CIRCLING | 1300-1 | 570 (600-1) | 1300-1½ 570 (600-1½) | 1520-2½ 790 (800-2½) |

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L



EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026