RNAV (GPS) RWY 28R
NORTH PERRY (HWO)


APP CRS	Rwy Ldg	3180
269°	TDZE	9
	Apt Elev	9

RNP APCH. RADAR required for procedure entry.


Rwy 28R helicopter visibility reduction below ¾ SM NA. Straight-in minimums NA at night. Circling Rwy 1R, 10L, 19L, 28R NA at night. Circling NA for Cat C south of Rwy 10R-28L.

MISSED APPROACH:
Climb to 2000 direct FRRDY and hold.

ATIS	MIAMI APP CON	NORTH PERRY TOWER*	GND CON	UNICOM
135.475	128.6 306.975	132.1 (CTAF) L 254.3	120.45 254.3	122.95

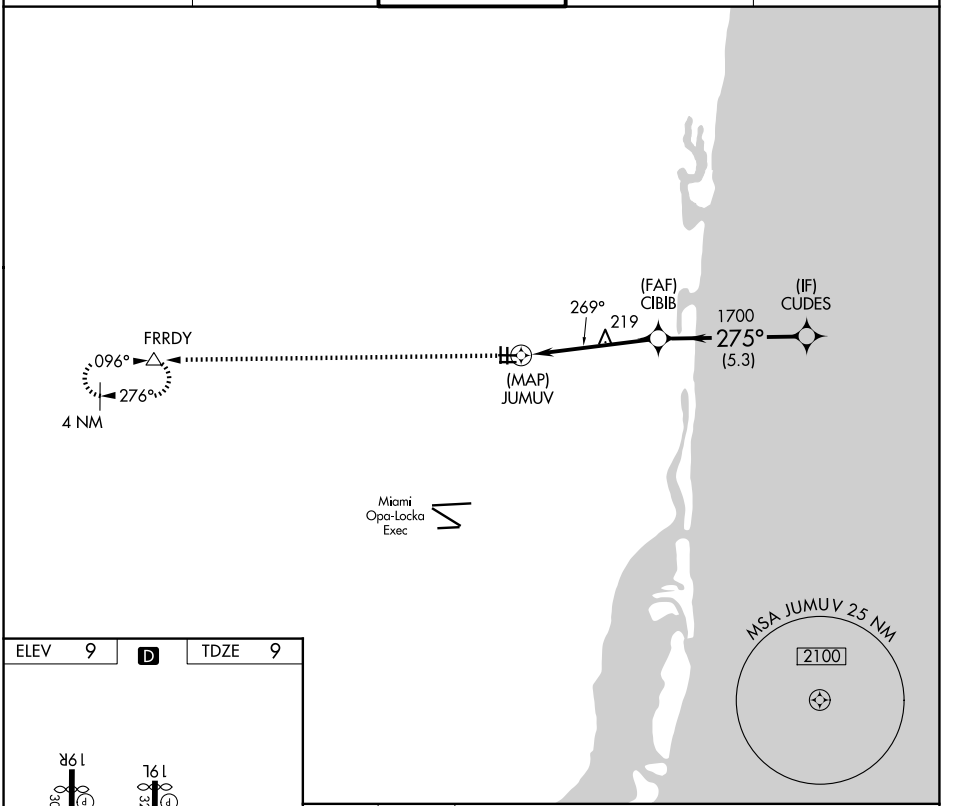


ELEV 9 D TDZE 9



REIL Rwys 1L, 10R, 19R and 28L
MIRL Rwys 10R-28L and 1L-19R L

2000 FRRDY

VGSI and descent angles not coincident
(VGSI Angle 3.50/TCH 39).

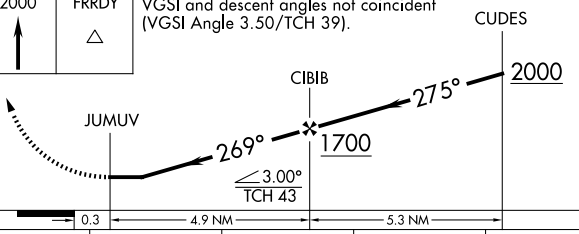

CATEGORY	A	B	C	D
LNAV MDA	520-1	511 (600-1)	520-1⅜ 511 (600-1⅜)	NA
CIRCLING	560-1	551 (600-1)	560-1½ 551 (600-1½)	NA

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026