ILS or LOC RWY 25

VIDALIA RGNL (VDI)

LOC I-VDI	APP CRS	Rwy Ldg	6002
110.3	249°	TDZE	273
		Apt Elev	274


ADF required.


When local altimeter setting not received, use Baxley altimeter setting and increase all DAs 77 feet and all MDAs 80 feet, increase S-LOC 25 Cat C/D visibility ⅛ mile, Circling Cat C/D visibility ¼ mile. For inop MALSR, increase S-LOC 25 Cat C/D visibility to 1⅜ mile. For inop MALSR, when using Baxley altimeter setting increase S-ILS 25 all Cats visibility to ⅞ mile. Night landing Rwy 32 NA.


MALSR

MISSED APPROACH: Climb to 1100 then climbing left turn to 2000 direct UQN NDB and hold.

AWOS-3	JACKSONVILLE CENTER	UNICOM
119.925	127.575 269.025	122.8 (CTAF) L

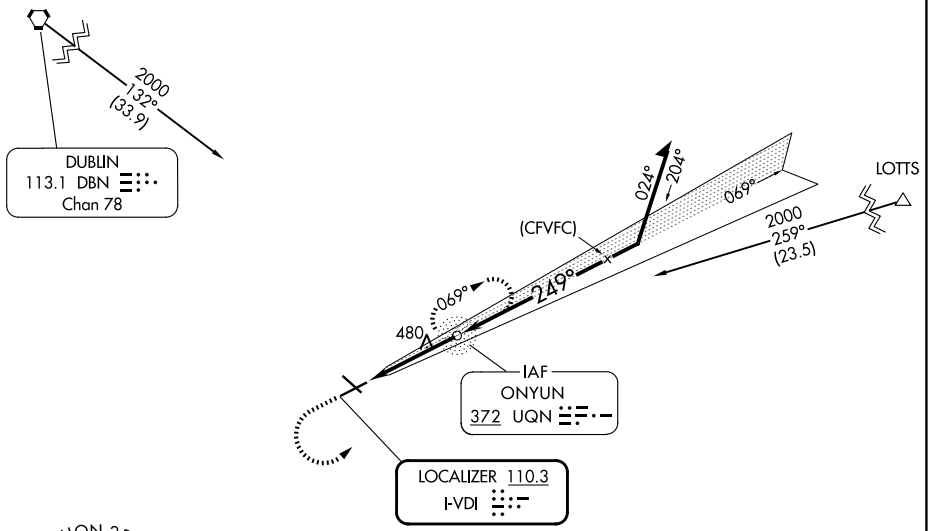




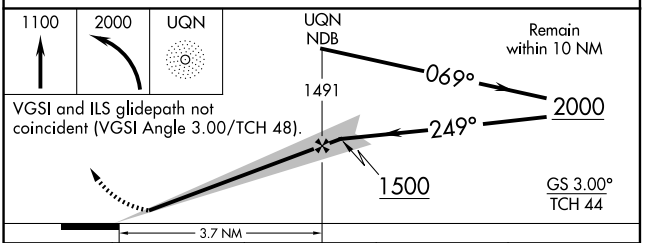

CATEGORY	A	B	C	D
S-ILS 25	473-½ 200 (200-½)			
S-LOC 25	740-½ 467 (500-½)		740-1 467 (500-1)	
CIRCLING	740-1 466 (500-1)		920-1¾ 646 (700-1¾)	1060-2½ 786 (800-2½)

ELEV 274 TDZE 273



HIRL Rwy 7-25 L
REIL Rwy 7 L

FAF to MAP 3.7 NM					
Knots	60	90	120	150	180
Min:Sec	3:42	2:28	1:51	1:29	1:14

SE-4, 29 OCT 2026 to 26 NOV 2026
SE-4, 29 OCT 2026 to 26 NOV 2026