RNAV (GPS) RWY 36

NACOGDOCHES A L MANGHAM JR RGNL (OCH)

WAAS	APP CRS	Rwy Ldg	5001
CH 93528	003°	TDZE	343
W36A		Apt Elev	343


RNP APCH-GPS.


T A Baro-VNAV NA when using LFK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C . When local altimeter setting not received, use LFK altimeter setting: Increase LPV DA to 598 feet; increase LNAV/VNAV DA to 680 feet; increase all MDAs 60 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.


MALSR

MISSED APROACH: Climb to 2400 direct XOWNU and on track 356° to DRBOB and hold.

AWOS-3PT	HOUSTON CENTER	UNICOM
135.625	125.175 285.575	123.0 (CTAF) L

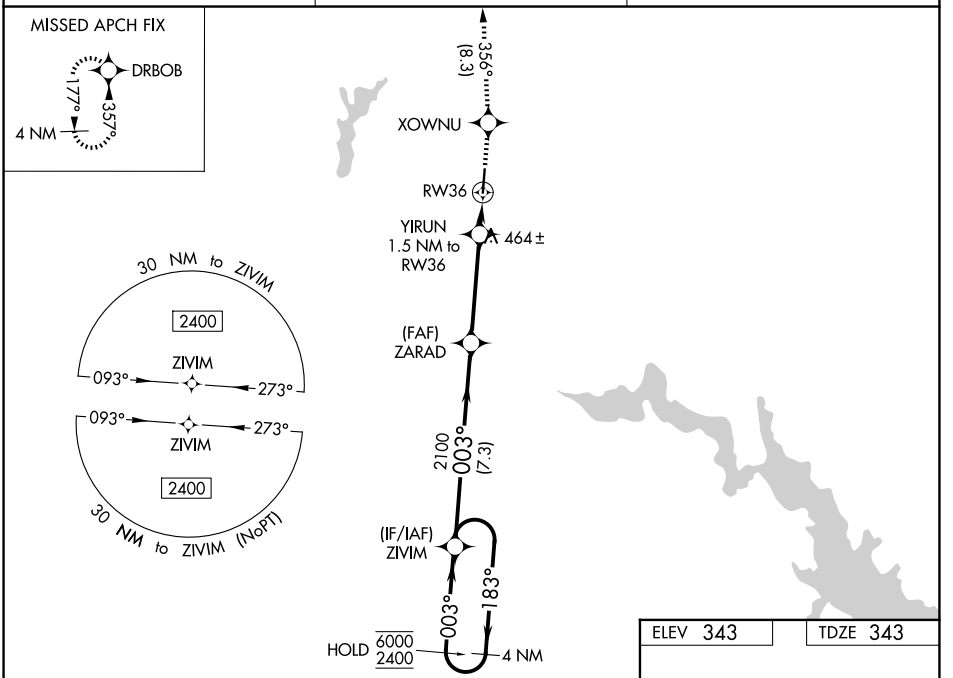

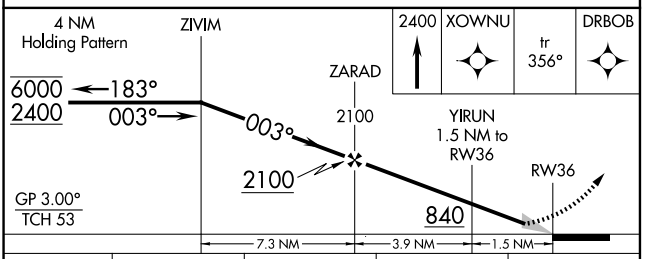

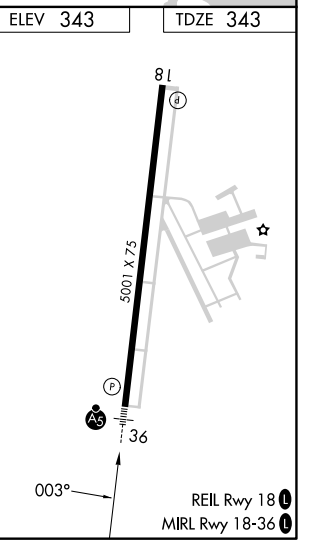

CATEGORY	A	B	C	D
LPV DA	543-½ 200 (200-½)			NA
LNAV/VNAV DA	625-½ 282 (300-½)			NA
LNAV MDA	720-½ 377 (400-½)		720-⅝ 377 (400-⅝)	NA
CIRCLING	860-1 517 (600-1)		1080-2 737 (800-2)	NA

SC-5, 29 OCT 2026 to 26 NOV 2026
SC-5, 29 OCT 2026 to 26 NOV 2026