RNAV (GPS) RWY 31

WEST BEND MUNI (ETB)


WAAS	APP CRS	Rwy Ldg	4494
CH 93816	308°	TDZE	879
W31A		Apt Elev	887

RNP APCH - GPS.


Baro-VNAV NA when using MWC altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. Rwy 31 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use MWC altimeter setting: increase LPV DA to 1241 feet; increase LNAV/VNAV DA to 1548 feet; increase all MDAs 80 feet and LNAV visibility Cat C ⅛ SM and Circling visibility Cat C/D ¼ SM. Circling Rwy 6 NA at night.


MISSED APPROACH: Climb to 3000 direct JESIB and hold.

AWOS-3	MILWAUKEE APP CON	CLNC DEL	UNICOM
120.0	125.35 307.0	124.75	123.05 (CTAF) L

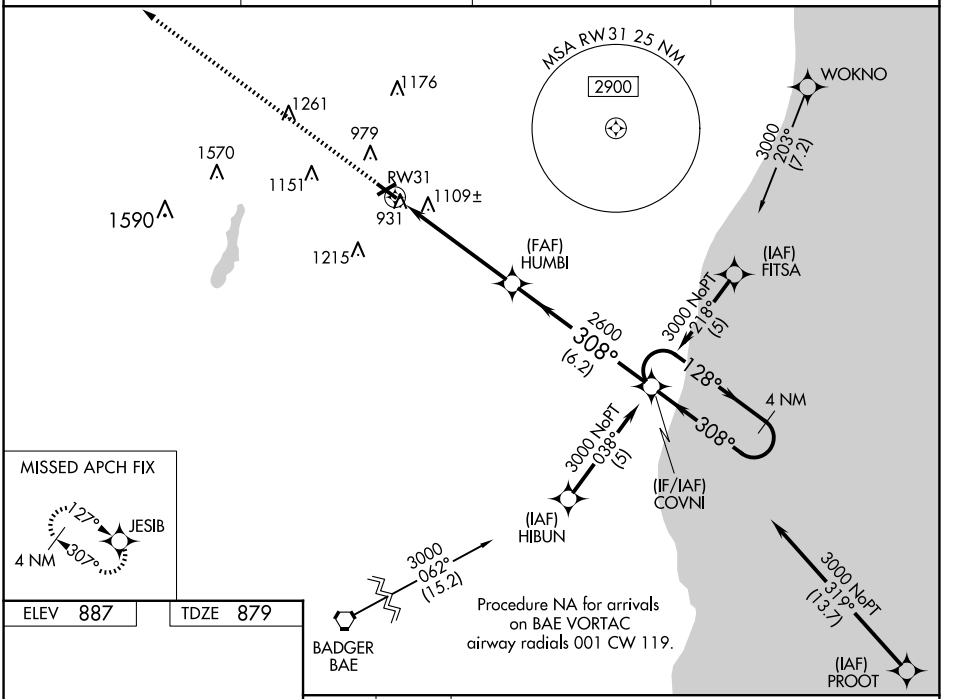

ELEV 887 TDZE 879



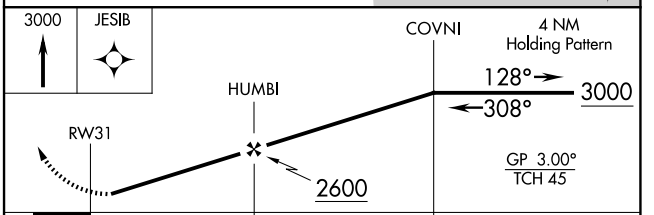

CATEGORY	A	B	C	D
LPV DA	1175-1 296 (300-1)			
LNAV/VNAV DA	1482-2 603 (600-2)			
LNAV MDA	1420-1 541 (600-1)		1420-1⅝ 541 (600-1⅛)	1420-1¾ 541 (600-1¾)
CIRCLING	1420-1 533 (600-1)	1520-1 633 (700-1)	1560-2 673 (700-2)	1560-2¼ 673 (700-2¼)

REIL Rwys 13 and 31 L
MIRL Rwys 6-24 and 13-31 L

EC-3, 29 OCT 2026 to 26 NOV 2026
EC-3, 29 OCT 2026 to 26 NOV 2026