WAAS CH 49222 W08A	APP CRS 084°	Rwy Ldg 6002 TDZE 698 Apt Elev 698

RNAV (GPS) RWY 8


WEST MICHIGAN RGNL (BIV)


RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Muskegon altimeter setting: increase LPV DA to 1018 feet, increase LNAV/VNAV DA to 1160 feet, and all visibilities ¼ SM, increase all MDAs 80 feet, and visibility LNAV Cat C/D ¼ SM and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Muskegon altimeter setting.

MISSED APPROACH: Climb to 3000 direct JAVPO and hold.

ASOS	GREAT LAKES APP CON*	CLNC DEL	UNICOM
119.025	133.825 290.35	123.95	123.05 (CTAF) L

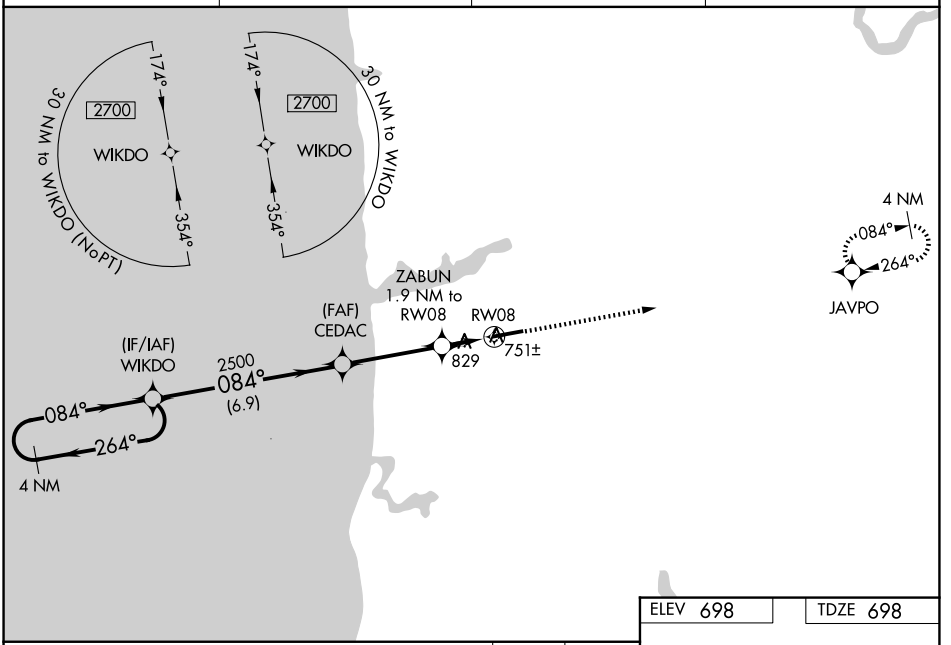

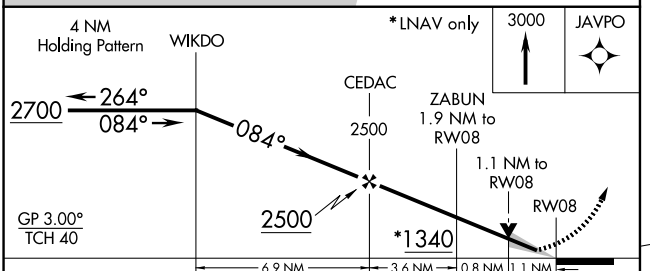

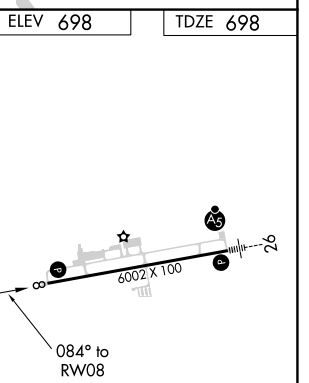

CATEGORY	A	B	C	D
LPV DA	948-⅞ 250 (300-⅞)			
LNAV/VNAV DA	1080-1⅛ 382 (400-1⅛)			
LNAV MDA	1080-1 382 (400-1)		1080-1⅛ 382 (400-1⅛)	
CIRCLING	1200-1 502 (600-1)	1240-1 542 (600-1)	1240-1½ 542 (600-1½)	1320-2 622 (700-2)

REIL Rwy 8 L
HIRL Rwy 8-26 L

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026