RNAV (GPS) RWY 14

DESTIN EXEC (DTS)


WAAS	APP CRS	Rwy Ldg	5001
CH 48923	143°	TDZE	23
W14A		Apt Elev	23

RNP APCH - GPS.


T A Baro-VNAV and VDP NA when using CEW altimeter setting. Rwy 14 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. When local altimeter setting not received, use CEW altimeter setting: increase LPV DA to 353 feet; increase LNAV/VNAV DA to 447 feet and all visibilities ⅛ SM; increase all MDAs 80 feet and LNAV visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 2000 direct AJLIP and hold.


ATIS	EGLIN APP CON	DESTIN TOWER★	GND CON
133.925	132.1 360.6	118.45 (CTAF) L	121.6

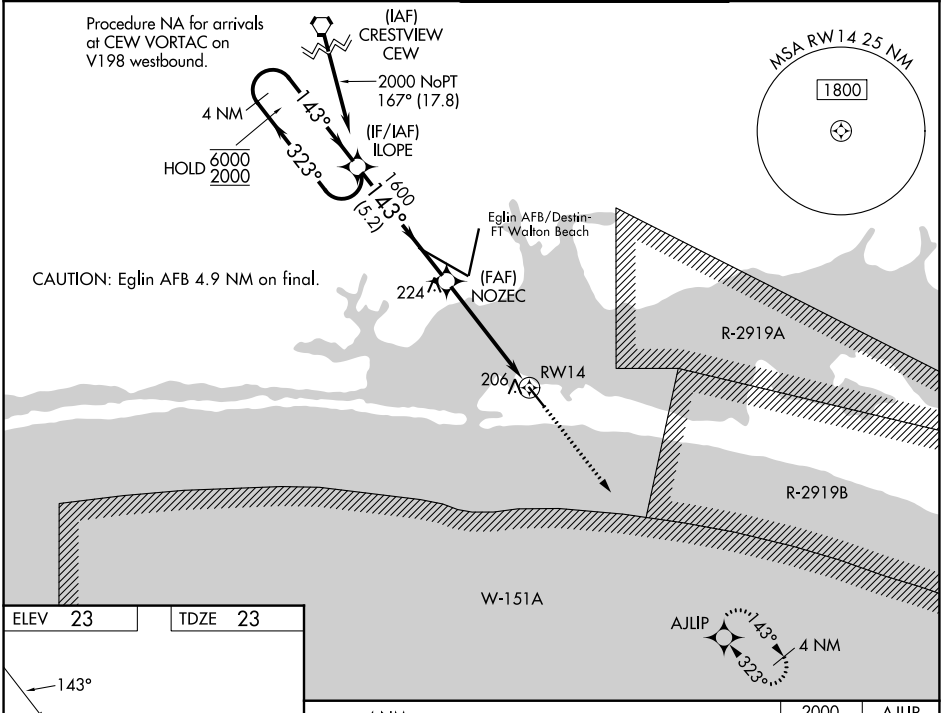

ELEV 23	TDZE 23

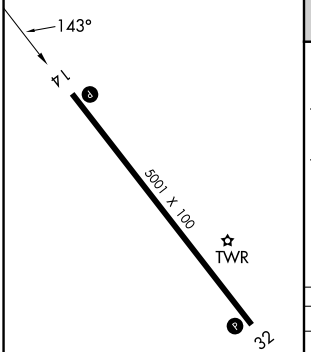

HIRL Rwy 14-32 L

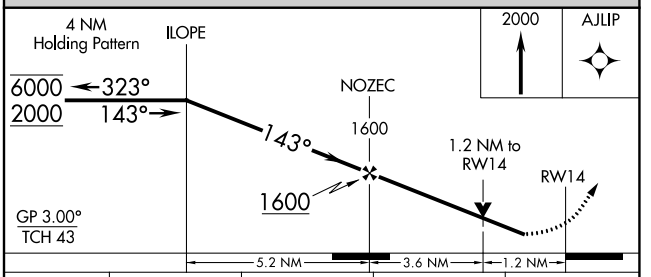

CATEGORY	A	B	C	D
LPV DA	273-1	250 (300-1)		
LNAV/VNAV DA	367-1⅛	344 (400-1⅛)		
LNAV MDA	460-1	437 (500-1)	460-1¼	437 (500-1¼)
CIRCLING	580-1	557 (600-1)	680-1¾ 657 (700-1¾)	680-2 657 (700-2)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026