RNAV (GPS) RWY 32

DESTIN EXEC (DTS)


WAAS	APP CRS	Rwy Ldg	5001
CH 56623	323°	TDZE	22
W32A		Apt Elev	23


RNP APCH - GPS.


Rwy 32 helicopter visibility reduction below ¾ SM NA. VDP NA when using CEW altimeter setting. When local altimeter setting not received, use CEW altimeter setting and increase all MDAs 80 feet and LP visibility Cats C and D ¼ SM, and LNAV visibility Cats C and D ⅜ SM, and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climbing left turn to 2000 direct AJLIP and hold.

ATIS	EGLIN APP CON	DESTIN TOWER ★	GND CON
133.925	132.1 360.6	118.45 (CTAF) L	121.6

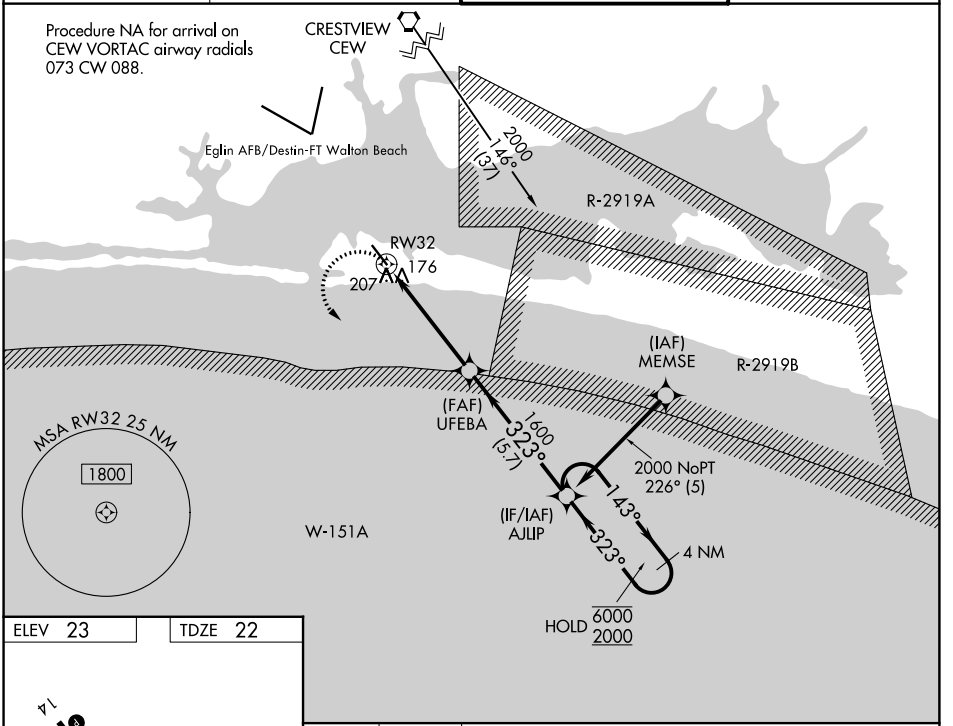

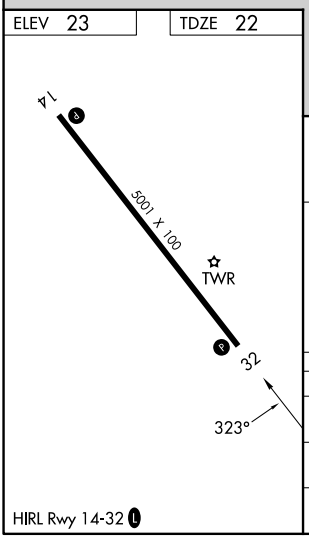

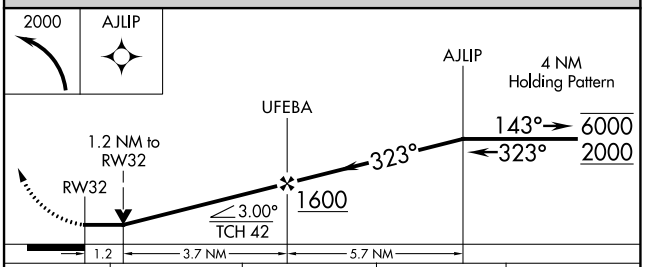

CATEGORY	A	B	C	D
LP MDA	440-1	418 (500-1)	440-1⅛	418 (500-1⅛)
LNAV MDA	540-1	518 (600-1)	540-1⅜	518 (600-1⅜)
CIRCLING	580-1	557 (600-1)	680-1¾ 657 (700-1¾)	680-2 657 (700-2)

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026