WAAS CH 99505 W18A	APP CRS 180°	Rwy Idg 5503 TDZE 1497 Apt Elev 1498

RNAV (GPS) RWY 18


MC PHERSON (MPR)


When local altimeter setting not received, use Salina altimeter setting: increase LPV DA to 1917 feet, LNAV/VNAV DA to 2120 feet and all visibilities ⅝ mile; increase all MDA 100 feet and visibility Cat C ⅜ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Salina altimeter setting. DME/DME RNP-0.3 NA. Circling NA to Rwys 8 and 26.

NA


MISSED APPROACH: Climb to 4100 direct ZOPMO and hold.

AWOS-3P	WICHITA APP CON	UNICOM
119.025	125.5 306.2	122.8 (CTAF) L

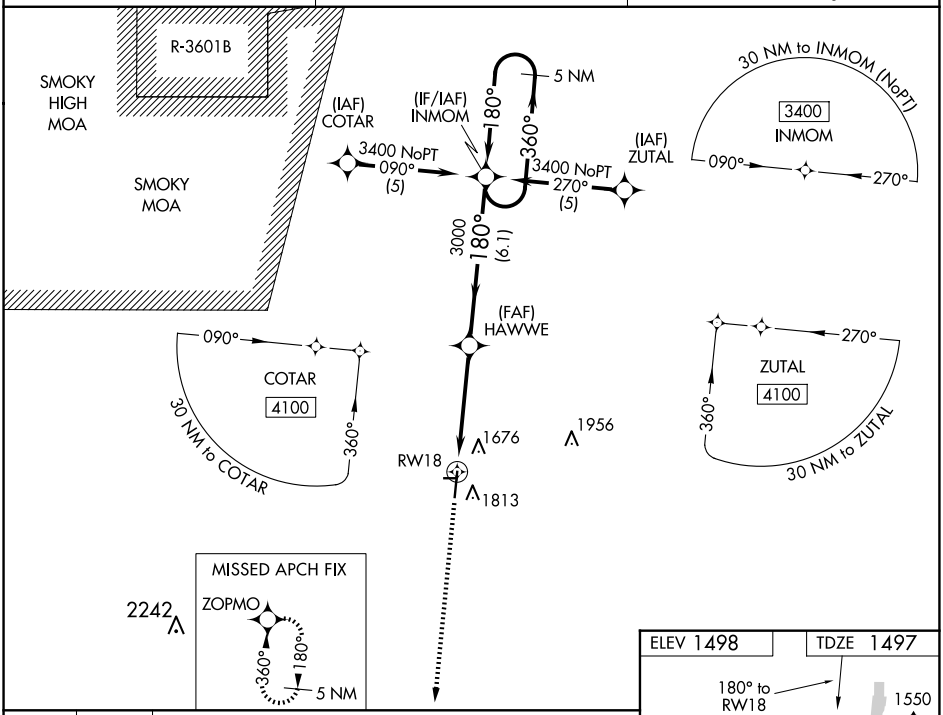

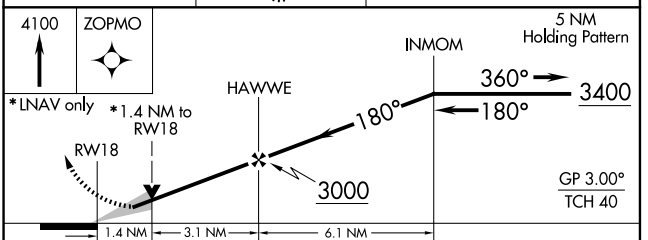

CATEGORY	A	B	C	D
LPV DA	1826-1⅛ 329 (400-1⅛)			NA
LNAV/VNAV DA	2029-1⅞ 532 (600-1⅞)			NA
LNAV MDA	1980-1 483 (500-1)		1980-1⅜ 483 (500-1⅜)	NA
CIRCLING	2120-1 622 (700-1)		2120-1¾ 622 (700-1¾)	NA

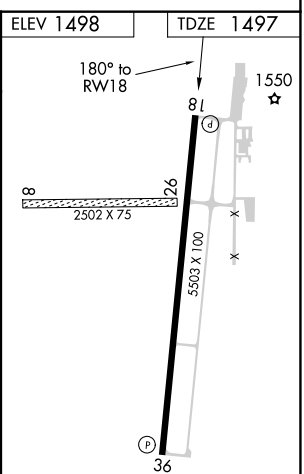

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026