RNAV (GPS) RWY 36

MC PHERSON (MPR)


WAAS	APP CRS	Rwy Idg	5503
CH 61205	360°	TDZE	1497
W36A		Apt Elev	1498


NA

When local altimeter setting not received, use Salina altimeter setting: increase LPV DA to 1838 feet, LNAV/VNAV DA to 2074 feet and all visibilities ⅜ mile; increase all MDA 100 feet and visibility Cat C ¼ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Salina altimeter setting. DME/DME RNP-0.3 NA. Circling NA to Rwys 8 and 26.

MISSED APPROACH: Climb to 3400 direct INMOM and hold.

AWOS-3P	WICHITA APP CON	UNICOM
119.025	125.5 306.2	122.8 (CTAF) L

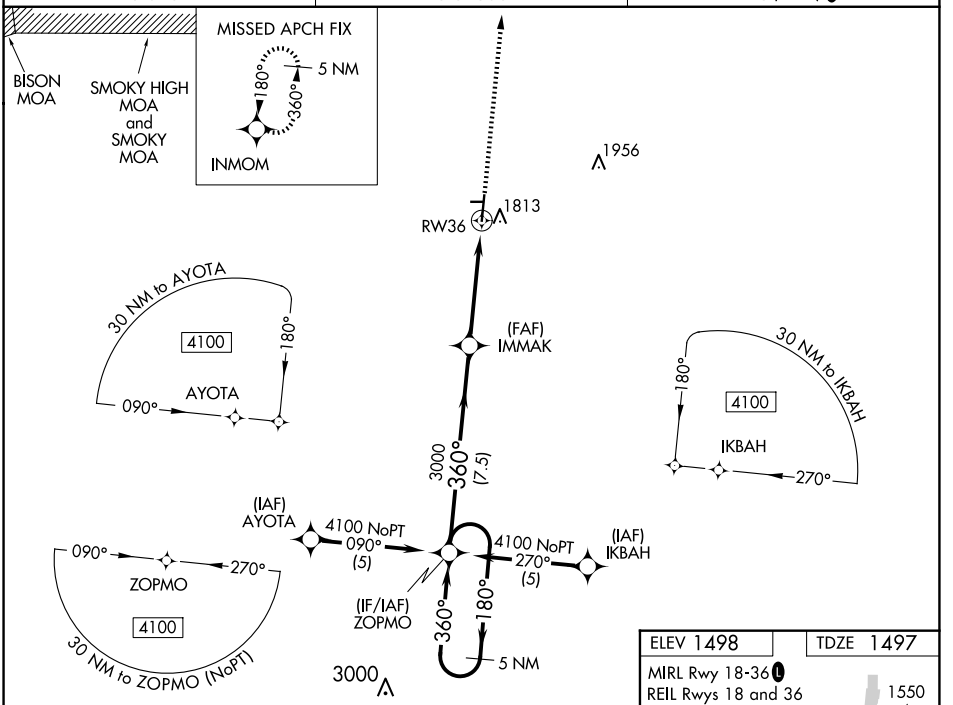

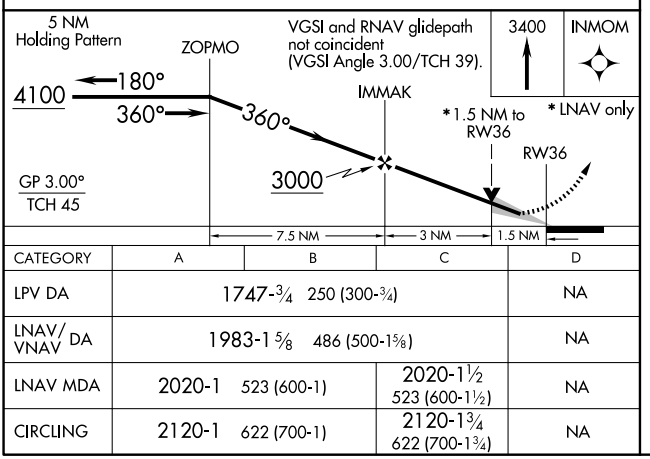


CATEGORY	A	B	C	D
LPV DA	1747-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1983-1⅝ 486 (500-1⅝)			NA
LNAV MDA	2020-1 523 (600-1)		2020-1½ 523 (600-1½)	NA
CIRCLING	2120-1 622 (700-1)		2120-1¾ 622 (700-1¾)	NA

ELEV 1498 TDZE 1497

MIRL Rwy 18-36 L

REIL Rwys 18 and 36

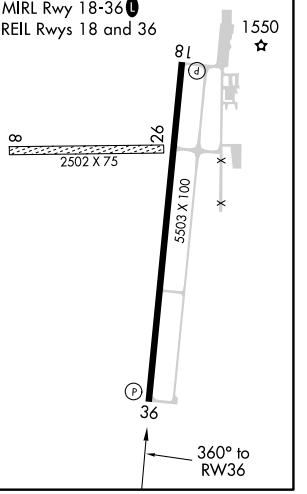

NC-2, 29 OCT 2026 to 26 NOV 2026
NC-2, 29 OCT 2026 to 26 NOV 2026