WAAS	APP CRS	Rwy Ldg	5001
CH 63124	050°	TDZE	847
W05A		Apt Elev	847

RNAV (GPS) RWY 5


SHELBY-CLEVELAND COUNTY RGNL (EHO)


RNP APCH - GPS.

Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using CLT altimeter setting. When local altimeter setting not received, use CLT altimeter setting and increase LPV DA to 1187 feet. Increase LNAV/VNAV DA to 1203 feet. Increase all MDAs 100 feet and LNAV visibility Cat C/D ¼ SM.


MISSED APPROACH: Climb to 4000 direct JIRUL and on track 046° to LINCO and hold.

AWOS-3	CHARLOTTE APP CON	UNICOM
118.425	120.05 257.2	122.8 (CTAF) L

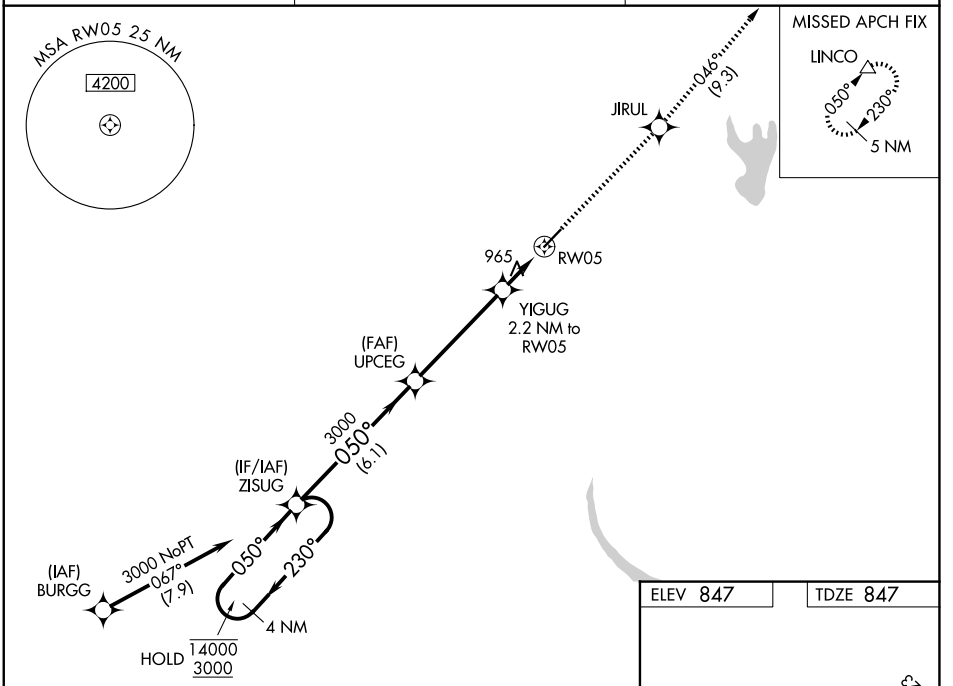

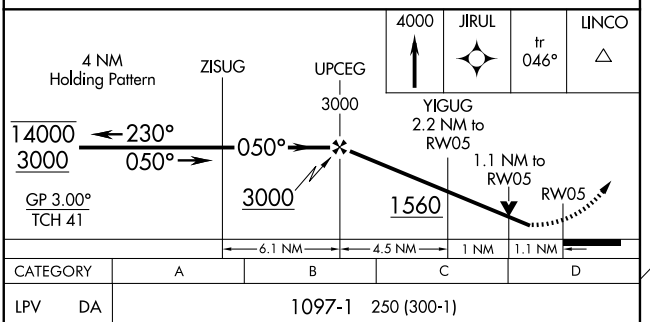

CATEGORY	A	B	C	D
LPV DA	1097-1 250 (300-1)			
LNAV/VNAV DA	1113-1 266 (300-1)			
LNAV MDA	1240-1 393 (400-1)		1240-1⅛ 393 (400-1⅛)	

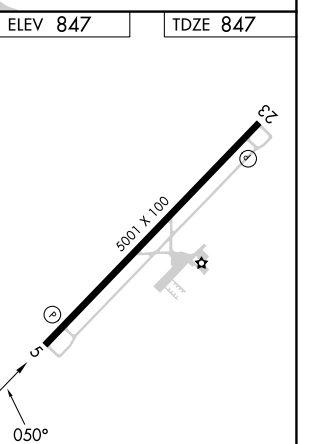

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026