LOC/DME I-APA	APP CRS		35R	35L
111.3	350°	Rwy Ldg	10001	7001
Chan 50		TDZE	5885	5869
		Apt Elev	5885	5885

AL-5715 (FAA)

ILS or LOC RWY 35R

CENTENNIAL (APA)


DME required for LOC only. RADAR required for procedure entry.

Rwy 35L helicopter visibility reduction below 1 SM NA. For inop ALS, increase S-LOC 35R Cat C/D visibility to 1⅝ SM. Sidestep and Circling Rwy 35L NA at night.


MALSR Rwy 35R


MISSED APPROACH: Climb to 7400 then climbing right turn to 9200 on heading 160° and FQF VORTAC R-197 to HOHUM INT/FQF 22.5 DME and hold.

ATIS	DENVER APP CON	CENTENNIAL TOWER	GND CON	CLNC DEL
120.3	132.75 269.3	118.9	121.8	128.6

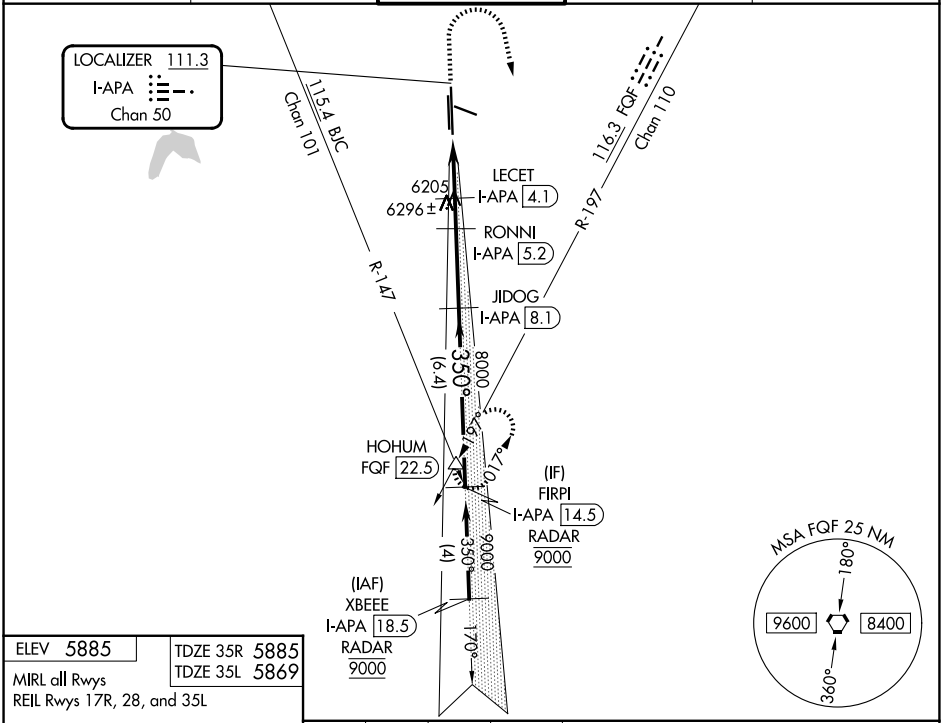

ELEV 5885	TDZE 35R 5885
MIRL all Rwys	TDZE 35L 5869
REIL Rwys 17R, 28, and 35L	

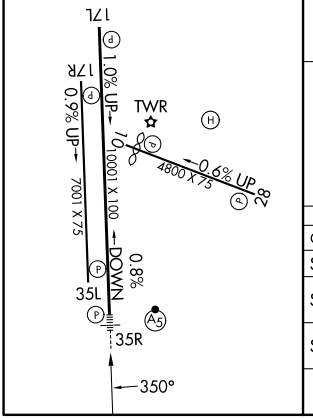

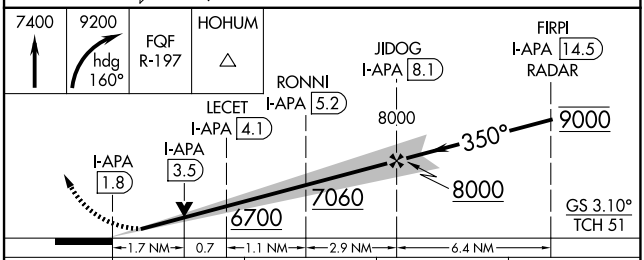

CATEGORY	A	B	C	D
S-ILS 35R	6085- ½ 200 (200-½)			
S-LOC 35R	6460- ½ 575 (600-½)		6460-1¼ 575 (600-1¼)	
SIDESTEP 35L	6460-1 591 (600-1)		6460-1½ 591 (600-1½)	6460-2 591 (600-2)
CIRCLING	6460-1 575 (600-1)	6540-1 655 (700-1)	6740-2½ 855 (900-2½)	6760-2¾ 875 (900-2¾)

SW-1, 29 OCT 2026 to 26 NOV 2026
SW-1, 29 OCT 2026 to 26 NOV 2026