WAAS	APP CRS	Rwy Ldg 4099
CH 70441	115°	TDZE 790
W11A		Apt Elev 790

RNAV (GPS) RWY 11


GEORGETOWN EXEC (GTU)


RNP APCH.

T A Rwy 11 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet. Increase LP and Circling Cat C/D visibility ¼ SM and LNAV Cat C/D visibility ⅛ SM. VDP NA when using Skylark Field altimeter setting.


MISSED APPROACH: Climbing left turn to 3000 direct DARTE and hold.

ATIS	AUSTIN APP CON	GEORGETOWN TOWER ★	GND CON	UNICOM
118.6	119.0 370.85	120.225 (CTAF) L	119.125	123.0

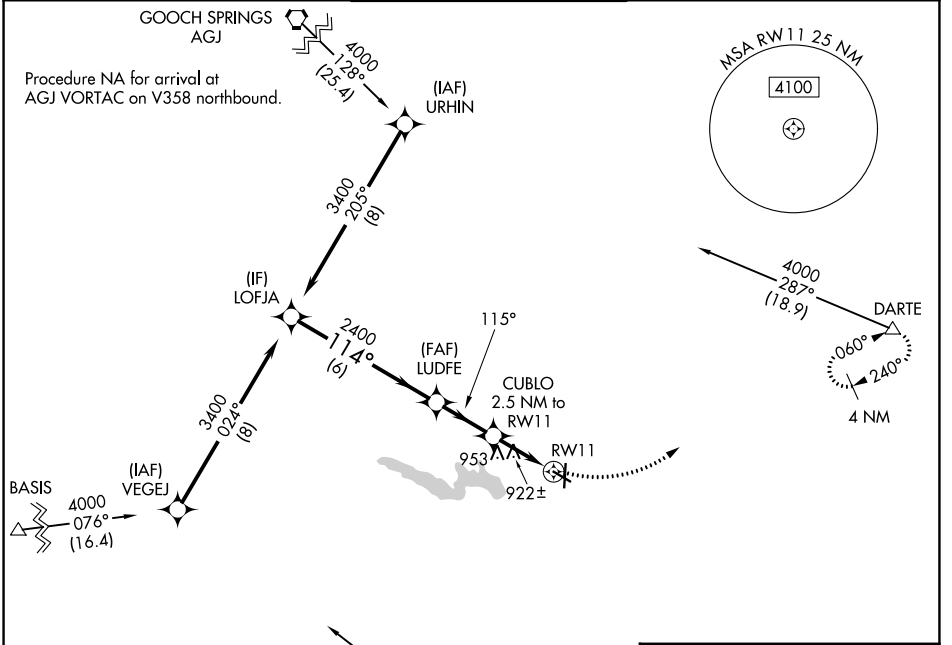

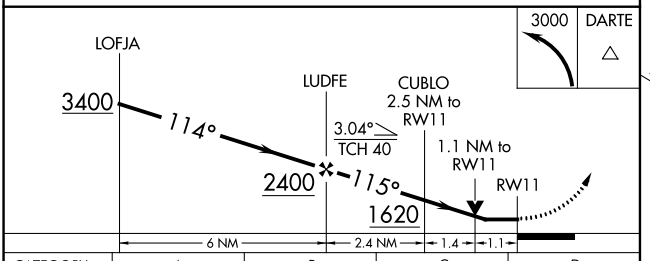

CATEGORY	A	B	C	D
LP MDA	1180-1 390 (400-1)		1180-1⅛ 390 (400-1⅛)	
LNAV MDA	1220-1 430 (500-1)		1220-1¼ 430 (500-1¼)	
CIRCLING	1240-1 450 (500-1)	1340-1 550 (600-1)	1360-1½ 570 (600-1½)	1640-2¾ 850 (900-2¾)

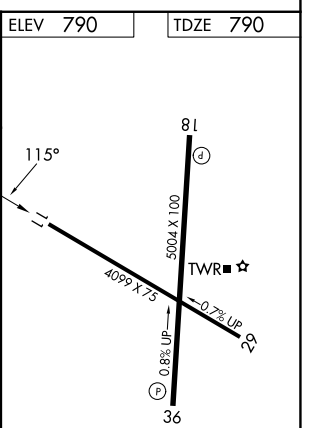

REIL Rwys 18 and 36 L
MIRL Rwys 11-29 and 18-36 L

SC-3, 29 OCT 2026 to 26 NOV 2026
SC-3, 29 OCT 2026 to 26 NOV 2026