WAAS CH 66002 W05A	APP CRS 053°	Rwy Ldg 7001 TDZE 683 Apt Elev 683

RNAV (GPS) RWY 5
CHARLOTTE/MONROE EXEC (EQY)


RNP APCH-GPS.

T A Rwy 5 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Inop table does not apply to LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM and LNAV all Cats visibility to 1 SM.


MALSR


MISSED APPROACH: Climb to 1140 then climbing right turn to 2500 direct MOSEE and hold.

ASOS	CHARLOTTE APP CON	CLNC DEL	UNICOM
135.775	120.05 307.8	132.55	122.7 (CTAF) L

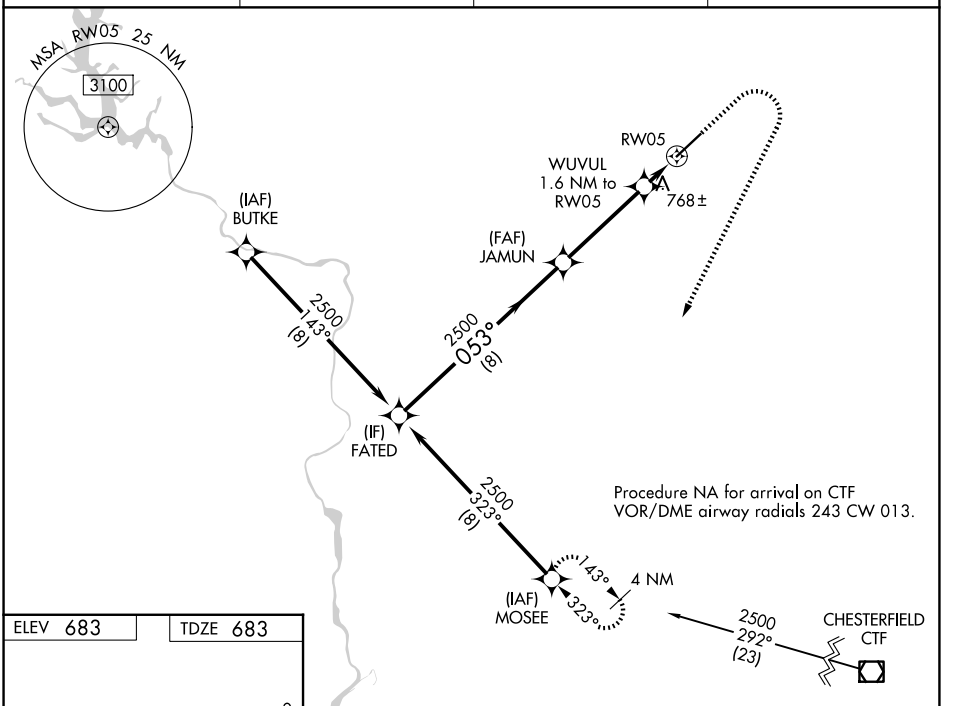

ELEV 683 TDZE 683



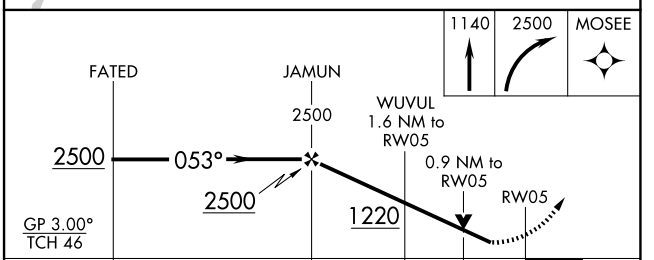

CATEGORY	A	B	C	D
LPV DA	933-¾ 250 (300-¾)			
LNAV/VNAV DA	1001-¾ 318 (400-¾)			
LNAV MDA	1020-¾ 337 (400-¾)			
CIRCLING	1220-1 537 (600-1)		1220-1½ 537 (600-1½)	1480-2½ 797 (800-2½)

HIRL Rwy 5-23 L
REIL Rwy 23 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026