WAAS	APP CRS	Rwy Ldg	4200
CH 82509	211°	TDZE	823
W21A		Apt Elev	823

RNAV (GPS) RWY 21
EAGLE CREEK AIRPARK (EYE)


RNP APCH - GPS.


Rwy 21 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Indianapolis Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Inop table does not apply. When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all MDAs 20 feet.

MALS


MISSED APPROACH: Climbing right turn to 2900 direct ANTTI and hold.

ASOS	INDIANAPOLIS APP CON	UNICOM
121.575	119.05 317.8	122.8 (CTAF) L

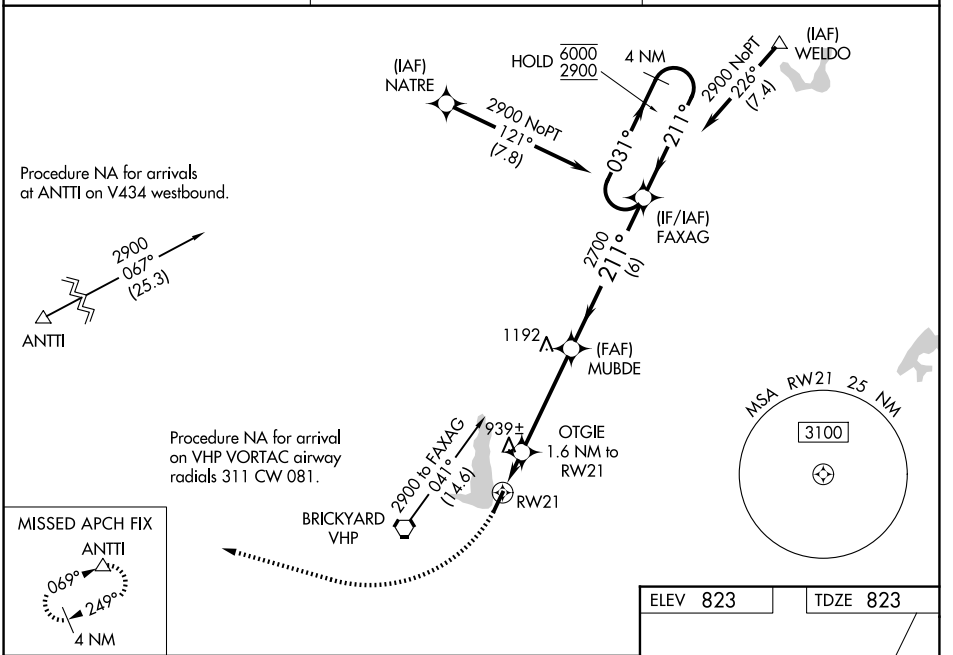

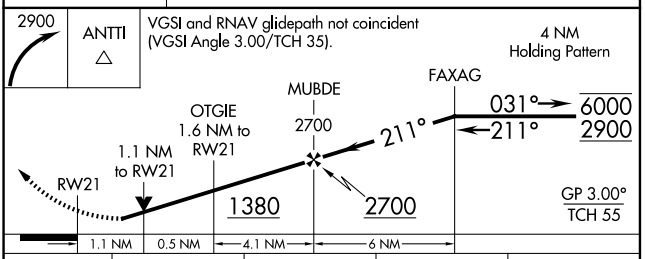

CATEGORY	A	B	C	D
LPV DA	1091-1	268 (300-1)		NA
LNAV/VNAV DA	1076-1	253 (300-1)		NA
LNAV MDA	1200-1	377 (400-1)		NA
CIRCLING	1320-1	497 (500-1)	1500-2 677 (700-2)	NA

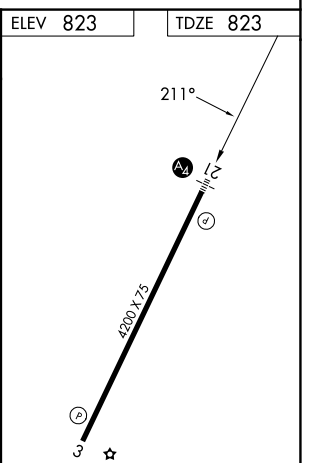

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026