RNAV (GPS) RWY 15


WARRENTON/FAUQUIER (HWY)

WAAS	APP CRS	Rwy Ldg	5000
CH 81926	149°	TDZE	327
W15A		Apt Elev	336

Baro-VNAV NA when using Culpeper altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Culpeper altimeter setting: increase LPV DA to 549 feet; increase LNAV/VNAV DA to 607 feet and all visibilities ⅛ SM; increase all MDAs 40 feet and Circling Cat D visibility ¼ SM.

MISSED APPROACH: Climb to 1800 then climbing right turn to 3000 direct CSN VORTAC and hold.

AWOS-3PT	POTOMAC APP CON	UNICOM
120.35	128.525 306.925	122.7 (CTAF) L

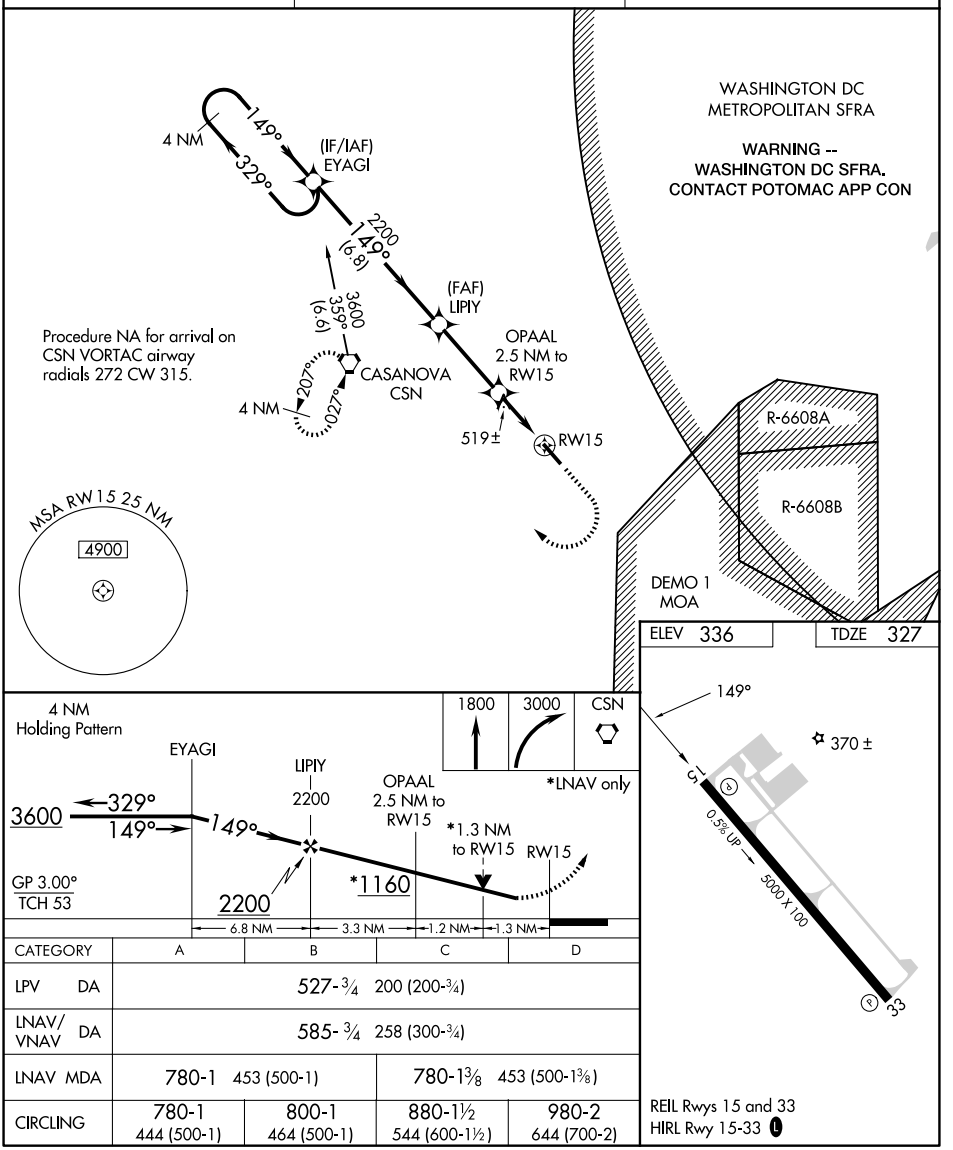

CATEGORY	A	B	C	D
LPV DA	527-¾ 200 (200-¾)			
LNAV/VNAV DA	585-¾ 258 (300-¾)			
LNAV MDA	780-1 453 (500-1)		780-1⅜ 453 (500-1⅜)	
CIRCLING	780-1 444 (500-1)	800-1 464 (500-1)	880-1½ 544 (600-1½)	980-2 644 (700-2)

REIL Rwys 15 and 33
HIRL Rwy 15-33 L

NE-3, 29 OCT 2026 to 26 NOV 2026