WAAS CH 50420 W30A	APP CRS 297°	Rwy Idg 3428 / TDZE 939 / Apt Elev 940

RNAV (GPS) RWY 30


M GRAHAM CLARK DOWNTOWN (PLK)

Baro-VNAV NA when using Branson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. VDP NA with KBBG altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Branson altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV and LNAV/VNAV all Cats visibility ¼ mile.


NA

MISSED APPROACH: Climb to 3200 direct RAWBE and hold.


SPRINGFIELD APP CON	UNICOM
126.35	122.7 (CTAF) L

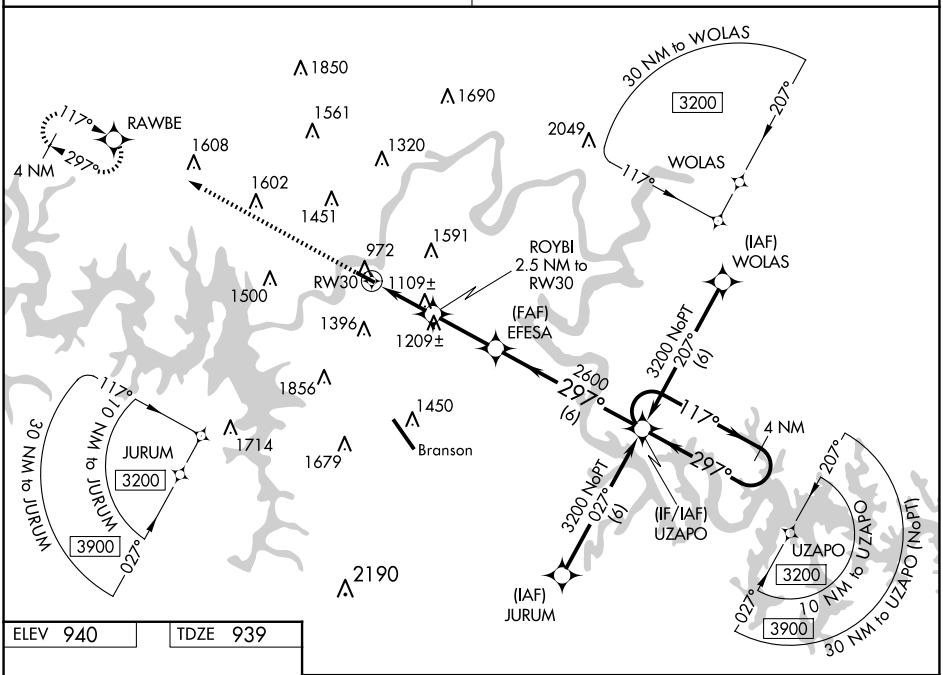

ELEV 940	TDZE 939



REIL Rwys 12 and 30 L
MIRL Rwy 12-30 L

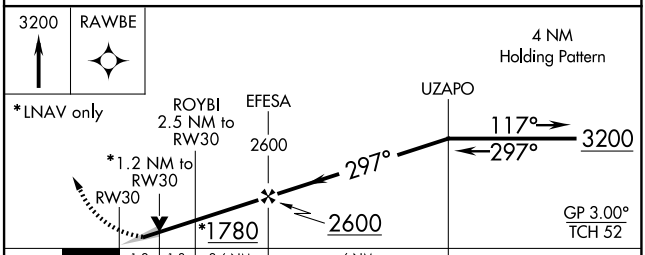

CATEGORY	A	B	C	D
LPV DA	1189-¾	250 (300-¾)	NA	
LNAV/VNAV DA	1224-⅞	285 (300-⅞)	NA	
LNAV MDA	1360-1	421 (500-1)	NA	
CIRCLING	1560-1	620 (700-1)	NA	

NC-3, 29 OCT 2026 to 26 NOV 2026
NC-3, 29 OCT 2026 to 26 NOV 2026