RNAV (GPS) RWY 4

DEXTER B FLORENCE MEML FLD (ADF)


WAAS	APP CRS	Rwy Ldg	5002
CH 49135	040°	TDZE	181
W04A		Apt Elev	182


DME/DME RNP-0.3 NA. When local altimeter setting not received use Hot Springs altimeter setting and increase all DA 103 feet and MDA 120 feet and increase LPV all Cats visibility ⅛ mile and LNAV/VNAV all Cats visibility and Circling Cat C visibility ½ mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV NA when using Hot Springs altimeter setting. Helicopter visibility reduction below ¾ SM NA. Night landing: Rwy 22 NA.

NA

MISSED APPROACH: Climb to 2100 direct COVNO and hold.

AWOS-3PT	MEMPLIS CENTER	UNICOM
118.175	128.475 377.15	122.7 (CTAF) L

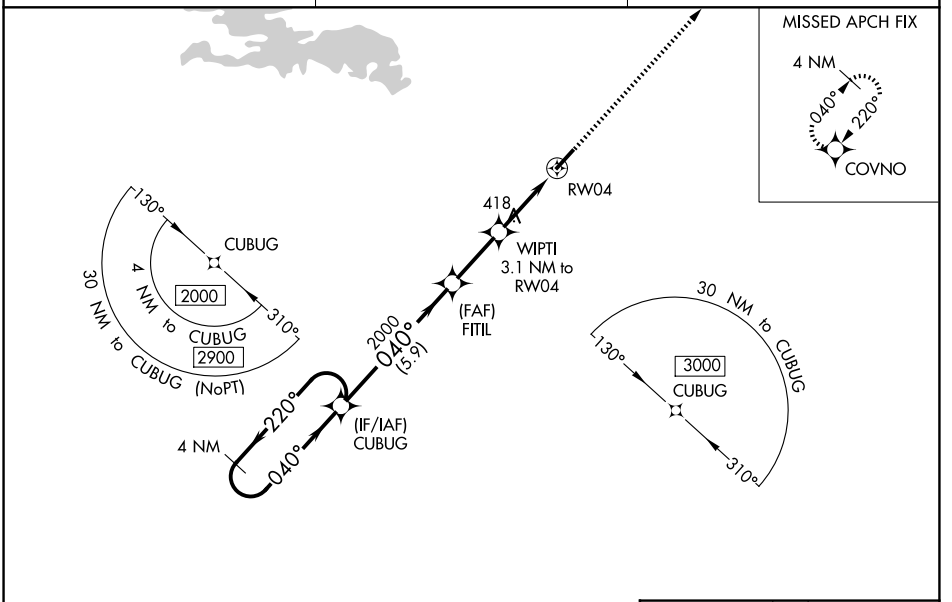

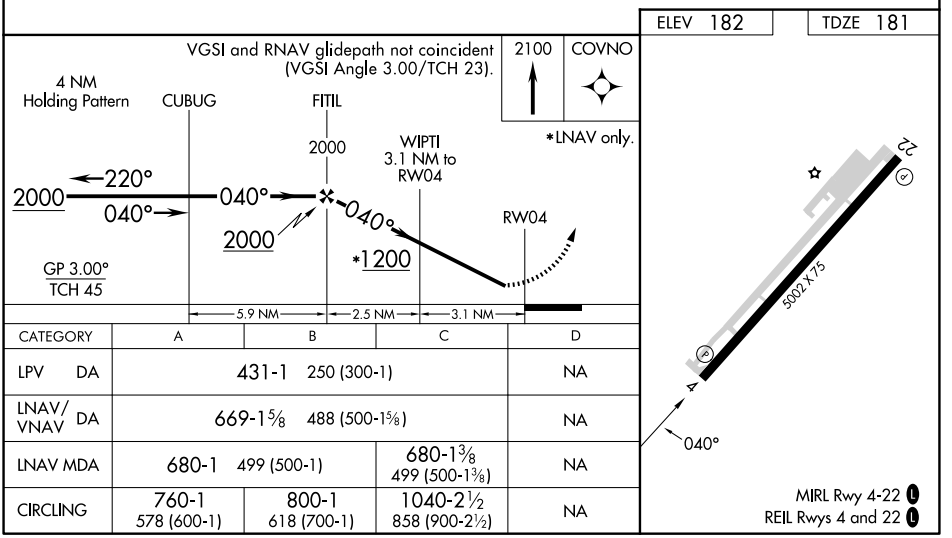

CATEGORY	A	B	C	D
LPV DA	431-1 250 (300-1)			NA
LNAV/VNAV DA	669-1⅝ 488 (500-1⅝)			NA
LNAV MDA	680-1 499 (500-1)		680-1⅜ 499 (500-1⅜)	NA
CIRCLING	760-1 578 (600-1)	800-1 618 (700-1)	1040-2½ 858 (900-2½)	NA

SC-1, 29 OCT 2026 to 26 NOV 2026
SC-1, 29 OCT 2026 to 26 NOV 2026