RNAV (GPS) RWY 15

KISSIMMEE GATEWAY (ISM)

WAAS CH 45507 W15A	APP CRS 153°	Rwy Ldg 6001 / TDZE 82 / Apt Elev 82


RNP APCH - GPS.

Baro-VNAV and VDP NA when using MCO altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Inop table does not apply to LPV all Cats. When local altimeter setting not received, use MCO altimeter setting and increase LPV DA to 360 feet; increase LNAV/VNAV DA to 548 feet and all visibilities ⅛ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D ⅛ SM, and Circling visibility Cat C ¼ SM.

MALSF

MISSED APPROACH: Climb to 2200 direct YARTU and on track 221° to TEMPE and hold.

ATIS	ORLANDO APP CON	KISSIMMEE TOWER ★	GND CON	UNICOM
128.775	119.4 351.9	124.45 (CTAF) L	121.7	122.95

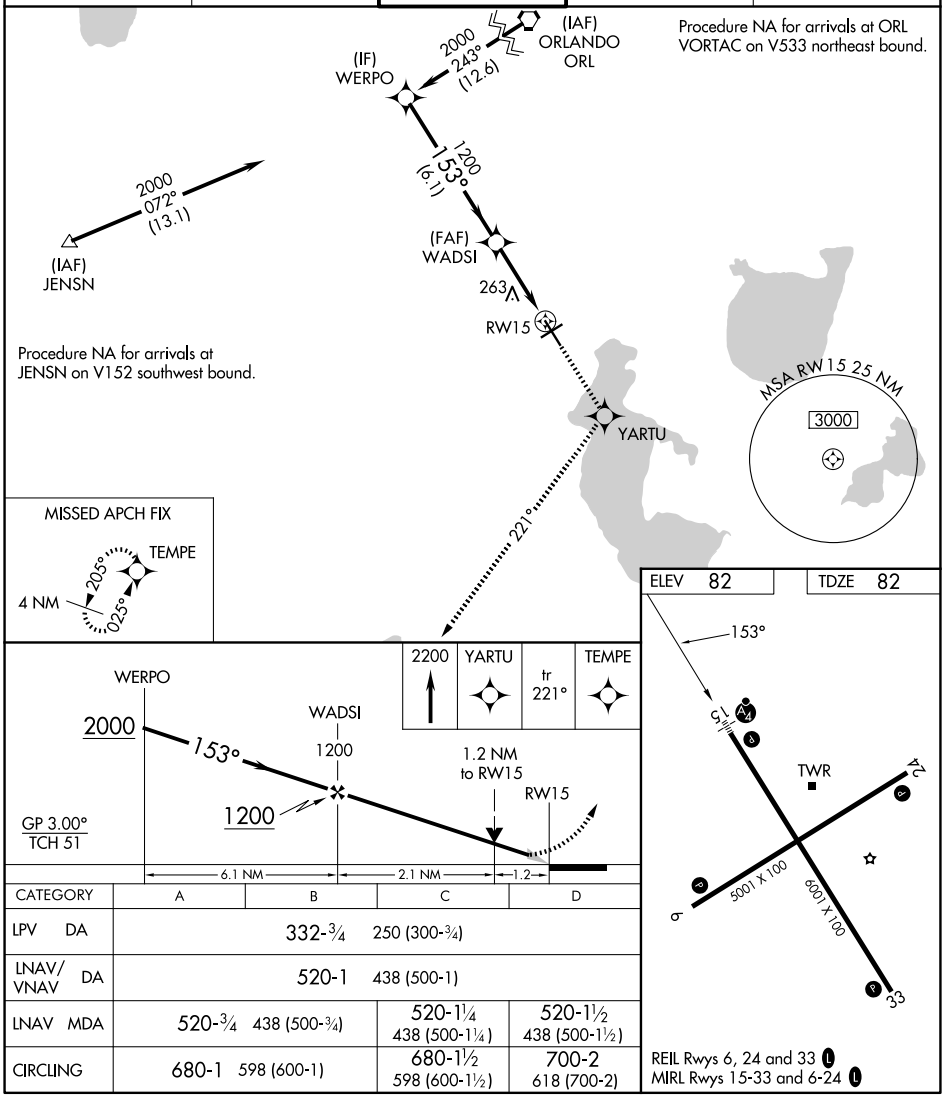

CATEGORY	A	B	C	D
LPV DA	332-¾		250 (300-¾)	
LNAV/VNAV DA	520-1		438 (500-1)	
LNAV MDA	520-¾	438 (500-¾)	520-1¼ 438 (500-1¼)	520-1½ 438 (500-1½)
CIRCLING	680-1	598 (600-1)	680-1½ 598 (600-1½)	700-2 618 (700-2)

REIL Rwys 6, 24 and 33 L
MIRL Rwys 15-33 and 6-24 L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026