# ILS or LOC RWY 13

## ST CLOUD SKY CENTRAL (STC)

| LOC I-BPM | APP CRS | Rwy Ldg | 7000 |
|---|---|---|---|
| 111.9 | 133° | TDZE | 1031 |
| | | Apt Elev | 1031 |


DME required.

For inop ALS when using Little Falls altimeter setting, increase S-ILS-13 all Cats visibility to ⅞ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase DA to 1307 feet; increase all MDAs 80 feet and S-LOC 13 visibility Cats C and D ⅛ SM, and Circling visibility Cats C and D ¼ SM. For inop ALS, increase S-LOC 13 Cats C and D visibility to 1¾ SM. DME from STC VOR/DME. DME use requires simultaneous reception of I-BPM and STC DME. VDP NA when using Little Falls altimeter setting.

MALSR


MISSED APPROACH: Climb to 2500 then climbing left turn to 5000 direct STC VOR/DME and on STC VOR/DME R-312 to SIYON/STC 14.5 DME and hold.

| ATIS | MINNEAPOLIS CENTER | ST. CLOUD TOWER * | GND CON |
|---|---|---|---|
| 119.375 | 121.05 235.775 | 118.25 (CTAF) L | 123.75 |

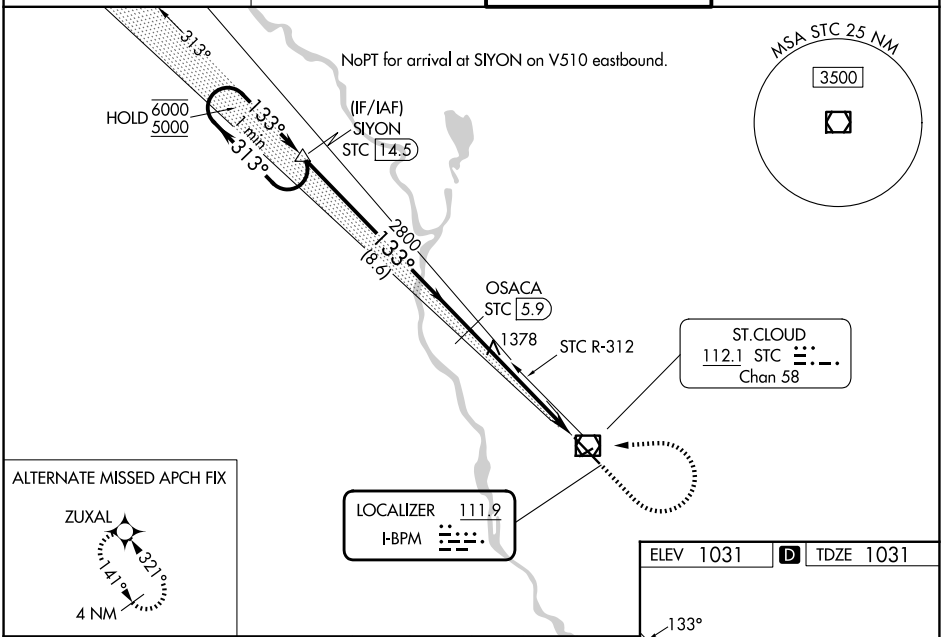



ALTERNATE MISSED APCH FIX

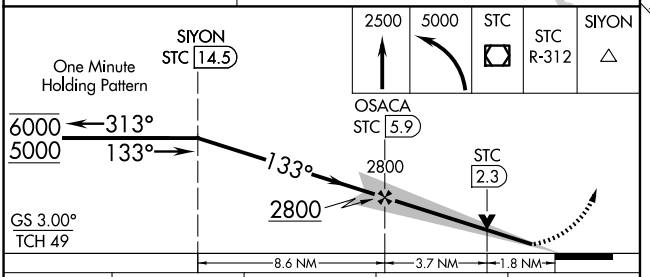


ELEV 1031 D TDZE 1031




MIRL Rwy 5-23 L
HIRL Rwy 13-31 L

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| S-ILS 13 | 1231-½ 200 (200-½) | | | |
| S-LOC 13 | 1640-½ 609 (700-½) | | 1640-1⅜ 609 (700-1⅜) | |
| CIRCLING | 1640-1 609 (700-1) | | 1640-1¾ 609 (700-1¾) | 1860-2¾ 829 (900-2¾) |

FAF to MAP 5.4 NM

| Knots | 60 | 90 | 120 | 150 | 180 |
|---|---|---|---|---|---|
| Min:Sec | 5:24 | 3:36 | 2:42 | 2:10 | 1:48 |



NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026