RNAV (GPS) RWY 31

ST CLOUD SKY CENTRAL (STC)

WAAS	APP CRS	Rwy Ldg	7000
CH 61213	313°	TDZE	1020
W31A		Apt Elev	1031

RNP APCH - GPS.

T A Baro-VNAV and VDP NA when using Little Falls altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS when using Little Falls altimeter setting, increase LPV all Cats visibility to ⅞ SM and LNAV/VNAV all Cats visibility to 1⅜ SM and LNAV Cats C and D visibility to 1⅜ SM. When local altimeter setting not received, use Little Falls altimeter setting, increase LPV DA to 1296 feet, increase LNAV/VNAV DA to 1503 feet and all visibilities ¼ SM; increase all MDAs 80 feet and LNAV visibility Cat C and D ¼ SM, and Circling visibility Cat C and D ¼ SM. For inop ALS, increase LNAV/VNAV visibility all Cats to 1⅛ SM.

MALSR A5

MISSED APPROACH: Climb to 3000 direct WELOK and hold.

ATIS	MINNEAPOLIS CENTER	ST. CLOUD TOWER *	GND CON
119.375	121.05 235.775	118.25 (CTAF) L	123.75

MISSED APCH FIX

4 NM 133° 313° WELOK

Procedure NA for arrivals at DAYLE on V510 and T330 northwest bound.

DAYLE

4000 145° (11.3)

MSA RW31 25 NM 3500

TLBAT

3000 to LOVVI 127° (21.3)

RW31

Procedure NA for arrivals at PLUGS on T383 southbound.

(FAF) POGOY

2700 313° (6)

3000 NoPT 223° (5) (IAF) ROCOK 210K

3000 269° (10.3) PLUGS

Procedure NA for arrivals at TLBAT on V2 northwest bound.


(IF/IAF) ZUXAL

3000 NoPT 043° (5) (IAF) LOVVI 210K

141° 321°


4 NM HOLD 6000 3000

ELEV 1031 D TDZE 1020



MIRL Rwy 5-23 L

HIRL Rwy 13-31 L

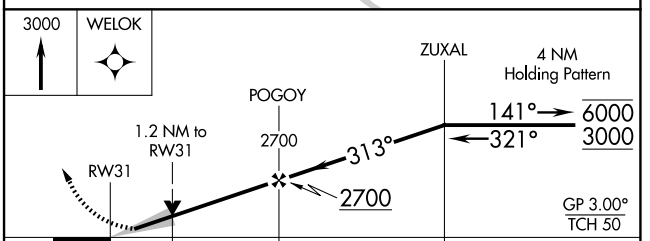

CATEGORY	A	B	C	D
LPV DA	1220-½ 200 (200-½)			
LNAV/VNAV DA	1427-¾ 407 (400-¾)			
LNAV MDA	1460-½ 440 (500-½)		1460-¾ 440 (500-¾)	
CIRCLING	1500-1 469 (500-1)		1620-1½ 589 (600-1½)	1860-2¾ 829 (900-2¾)

NC-1, 29 OCT 2026 to 26 NOV 2026
NC-1, 29 OCT 2026 to 26 NOV 2026