WAAS	APP CRS		
CH **56611**	**233°**	Rwy Ldg	**4699**
W23A		TDZE	**431**
		Apt Elev	**434**

RNAV (GPS) RWY 23

SARATOGA COUNTY (5B2)


RNP APCH.

V A NA

Baro-VNAV and VDP NA when using Albany altimeter setting. Rwy 23 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Circling NA at night. When local altimeter setting not received, use Albany altimeter setting and increase all DAs 63 feet and MDAs 80 feet. Increase LPV and LNAV/VNAV all Cats visibility ⅛ SM, LNAV Cats C/D visibility ⅜ SM, and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct WALTU and hold.


AWOS-3	ALBANY APP CON	GCO	UNICOM
132.025	**118.05 263.075**	**118.125**	**123.075** (CTAF) L

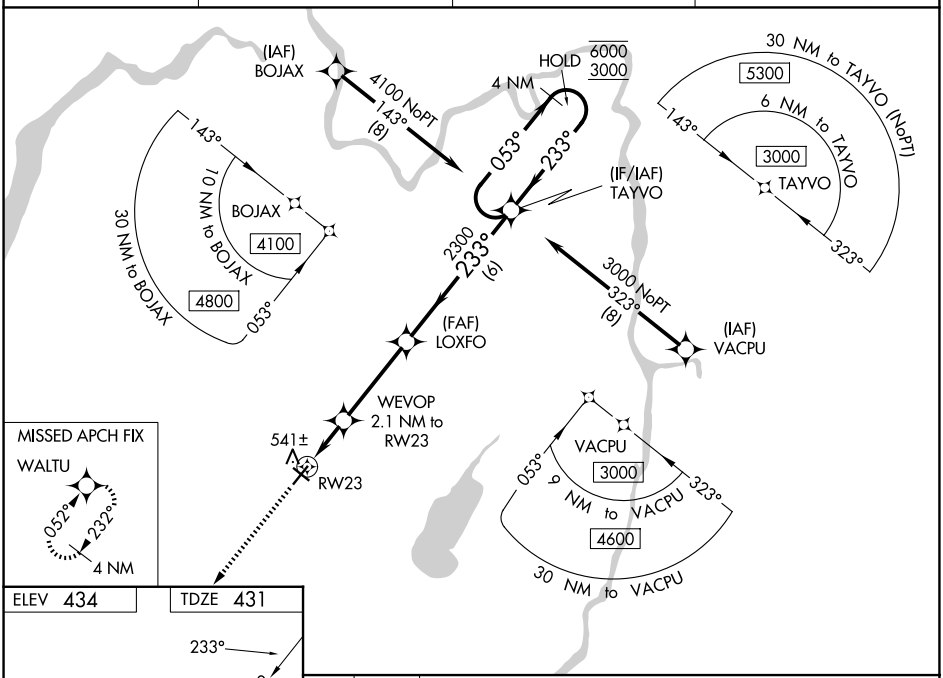


NE-2, 29 OCT 2026 to 26 NOV 2026

NE-2, 29 OCT 2026 to 26 NOV 2026

ELEV 434 TDZE 431

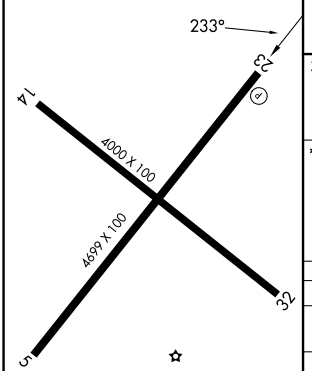

MIRL Rwy 5-23 L
MIRL Rwy 14-32
REIL Rwys 5 and 23 L

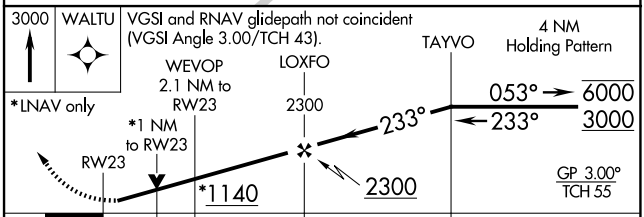

CATEGORY	A	B	C	D
LPV DA	698-⅞ 267 (300-⅞)			
LNAV/VNAV DA	706-⅞ 275 (300-⅞)			
LNAV MDA	800-1 369 (400-1)			
CIRCLING	980-1 546 (600-1)	1080-1 646 (700-1)	1140-2 706 (800-2)	1340-3 906 (1000-3)