RNAV (GPS) RWY 5

BARTOW EXEC (BOW)


WAAS CH 58112 W05A	APP CRS 050°	Rwy Ldg 5001 TDZE 123 Apt Elev 125


RNP APCH - GPS.


Rwy 5 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using TPA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use TPA altimeter setting and increase LPV DA to 556 feet, LNAV/VNAV DA to 618 feet and LNAV MDA 120 feet. Increase LPV and LNAV/VNAV all Cats visibility and LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH: Climb to 2300 direct ZOMOV and hold.

AWOS-3	TAMPA APP CON	BARTOW TOWER ★	GND CON	UNICOM
123.775	120.65 290.3	121.2 L (CTAF)	121.9	122.95

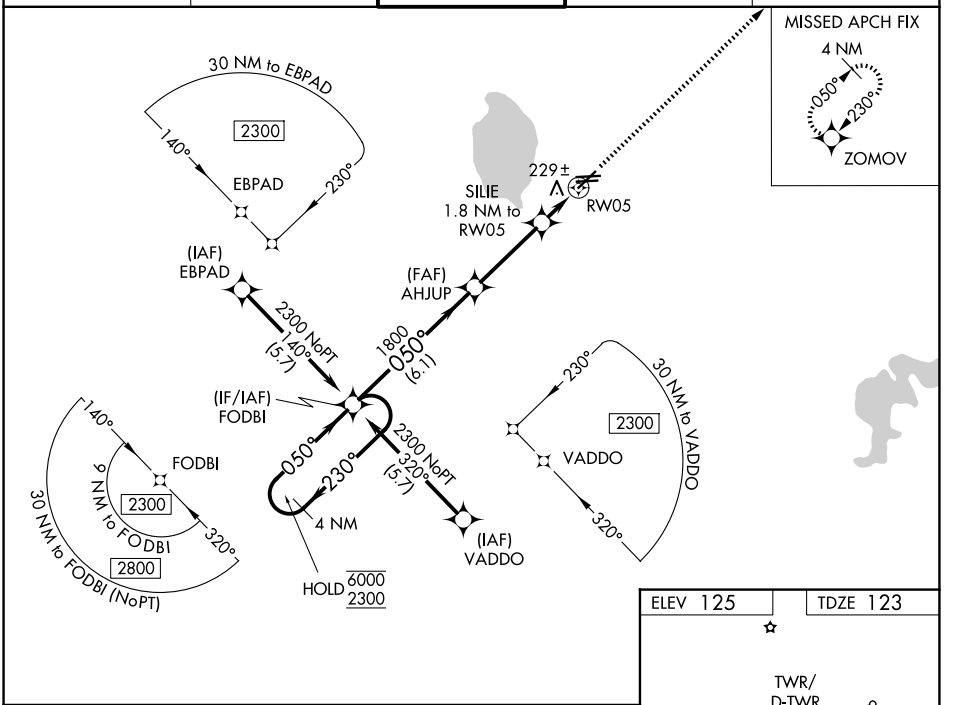

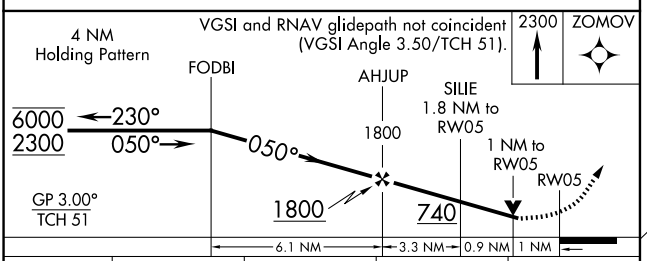

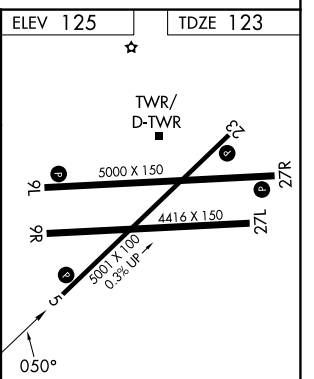

CATEGORY	A	B	C	D
LPV DA	447-1	324 (400-1)		
LNAV/VNAV DA	509-1⅛	386 (400-1⅛)		
LNAV MDA	520-1	397 (400-1)	520-1⅛	397 (400-1⅛)

MIRL Rwys 5-23 and 9L-27R L
REIL Rwys 5, 23, 9L and 27R L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026