RNAV (GPS) RWY 9L

BARTOW EXEC (BOW)


WAAS CH 90511 W09A	APP CRS 091°	Rwy Ldg 5000 TDZE 125 Apt Elev 125


RNP APCH.

Rwy 9L helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Intl altimeter setting and increase LPV DA to 548 feet, LNAV/VNAV DA to 645 feet and all MDA 120 feet, increase LNAV Cat C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. VDP and Baro-VNAV NA when using Tampa Intl altimeter setting.

MISSED APPROACH: Climb to 2000 direct IVONY and hold.

AWOS-3	TAMPA APP CON	BARTOW TOWER ★	GND CON	UNICOM
123.775	120.65 290.3	121.2 L (CTAF)	121.9	122.95

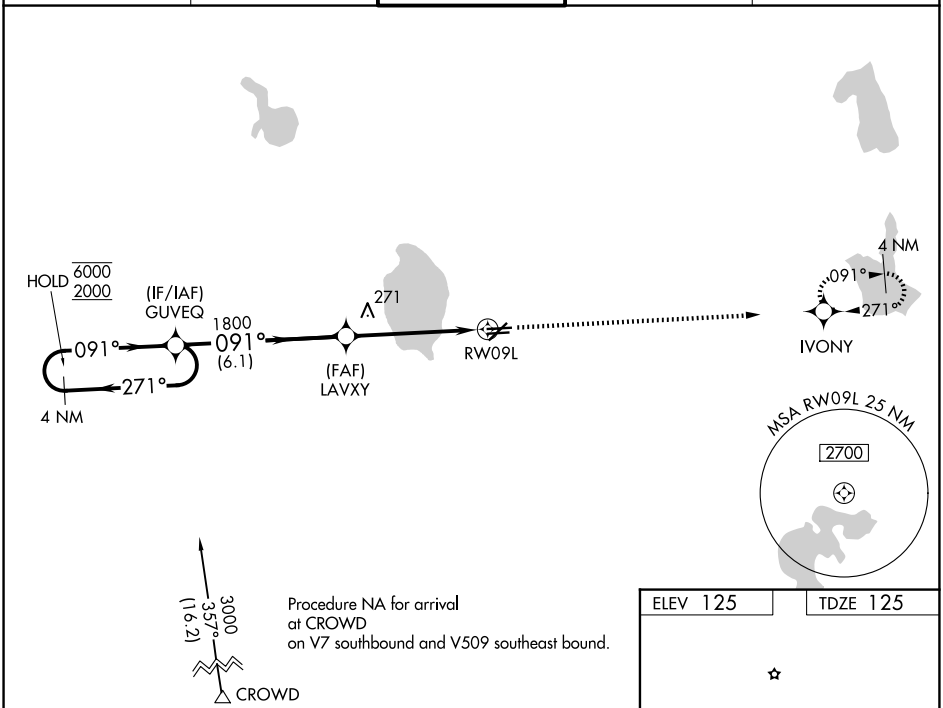

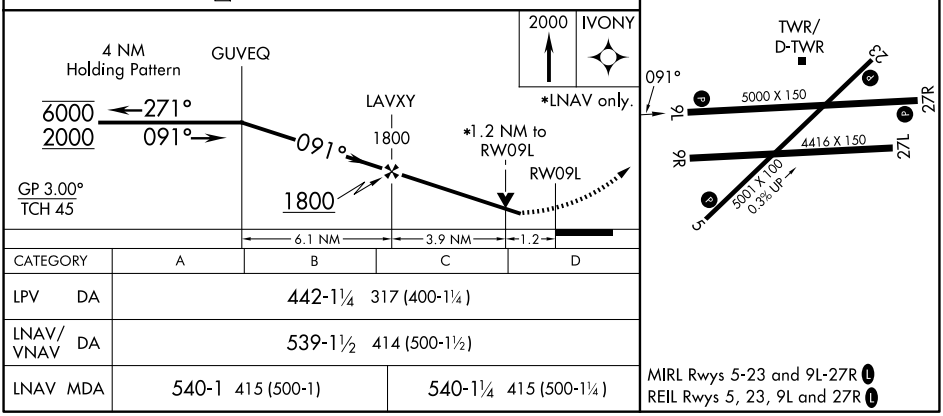

CATEGORY	A	B	C	D
LPV DA	442-1¼ 317 (400-1¼)			
LNAV/ VNAV DA	539-1½ 414 (500-1½)			
LNAV MDA	540-1 415 (500-1)		540-1¼ 415 (500-1¼)	

MIRL Rwys 5-23 and 9L-27R L
REIL Rwys 5, 23, 9L and 27R L

SE-3, 29 OCT 2026 to 26 NOV 2026
SE-3, 29 OCT 2026 to 26 NOV 2026