
CHARLOTTE DEP CON
120.05 307.8
AWOS-3
120.825
GCO
121.725


TOP ALTITUDE: 3000

RNAV 1- DME/DME/IRU or GPS.
RADAR required.

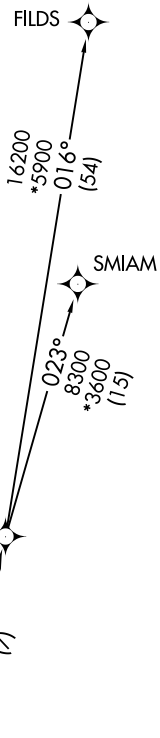

TAKEOFF MINIMUMS
Rwy 6: 300-1¼ or standard with minimum climb of 268'/NM to 700.
Rwy 24: 300-1¼ or standard with minimum climb of 275'/NM to 700.

NOTE: Jet aircraft only.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for vectors to JDEAN, then on depicted route to KRITR. Then on assigned transition. Maintain 3000. Expect filed altitude 10 minutes after departure.

FILDS TRANSITION (KRITR9.FILDS)
SMIAM TRANSITION (KRITR9.SMIAM)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026