| WAAS CH **70416** **W24A** | APP CRS **246°** | Rwy Ldg **6004** TDZE **486** Apt Elev **486** |
|---|---|---|

# RNAV (GPS) RWY 24


## LANCASTER COUNTY-MC WHIRTER FLD (LKR)

RNP APCH - GPS.


Straight-in/Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Baro-VNAV and VDP NA when using UZA altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use UZA altimeter setting: increase LPV DA to 805 feet; increase LNAV/VNAV DA to 1086 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cats C/D ¼ SM.

MISSED APPROACH: Climb to 2200 direct CORON and hold.

| AWOS-3 | CHARLOTTE APP CON | GCO | UNICOM |
|---|---|---|---|
| **120.825** | **120.05 307.8** | **121.725** | **122.725** (CTAF) L |

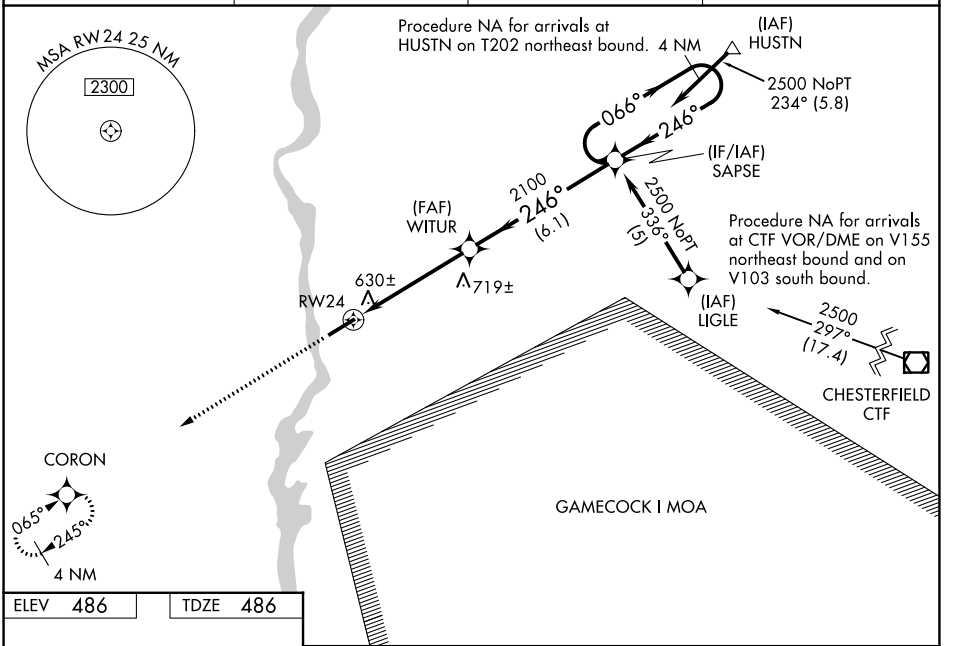



| ELEV 486 | TDZE 486 |
|---|---|




MIRL Rwy 6-24 L

REIL Rwys 6 and 24 L

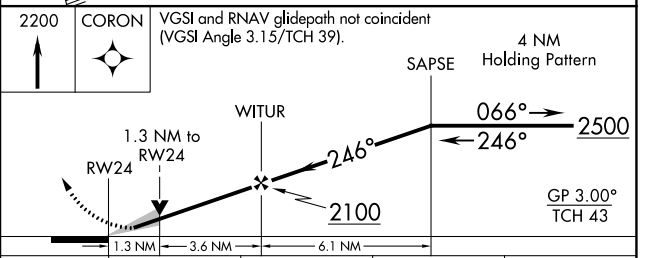


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 736-1 250 (300-1) | | | |
| LNAV/VNAV DA | 1017-2 531 (600-2) | | | |
| LNAV MDA | 960-1 474 (500-1) | | 960-1⅜ 474 (500-1⅜) | 960-1½ 474 (500-1½) |
| CIRCLING | 1040-1 554 (600-1) | 1060-1 574 (600-1) | 1120-1¾ 634 (700-1¾) | 1160-2¼ 674 (700-2¼) |



SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026