WAAS CH **86816** **W06A**	APP CRS **065°**	Rwy Ldg **5899** TDZE **470** Apt Elev **486**

RNAV (GPS) RWY 6


LANCASTER COUNTY-MC WHIRTER FLD (LKR)


RNP APCH - GPS.


When Circling to Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use UZA altimeter setting: increase LPV DA to 739 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1009 feet; increase all MDAs 80 feet and LNAV visibility Cat C ¼ SM, LNAV visibility Cat D ⅛ SM, and Circling visibility Cats C/D ¼ SM. Baro-VNAV and VDP NA when using UZA altimeter setting.

MISSED APPROACH: Climb to 2500 direct SAPSE and hold.

AWOS-3	CHARLOTTE APP CON	GCO	UNICOM
120.825	**120.05 307.8**	**121.725**	**122.725** (CTAF) L

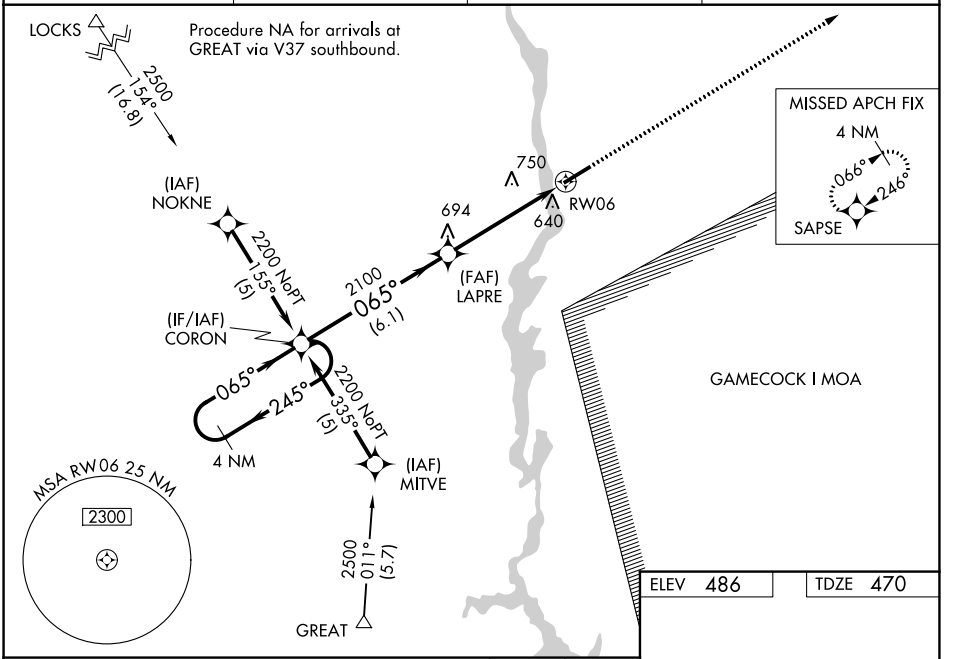

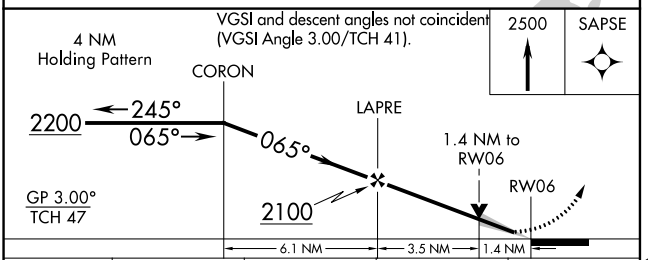



CATEGORY	A	B	C	D
LPV DA	670-¾	200 (200-¾)		
LNAV/VNAV DA	940-2	470 (500-2)		
LNAV MDA	940-1	470 (500-1)	940-1⅜ 470 (500-1⅜)	940-1½ 470 (500-1½)
CIRCLING	1040-1 554 (600-1)	1060-1 574 (600-1)	1120-1¾ 634 (700-1¾)	1160-2¼ 674 (700-2¼)

MIRL Rwy 6-24 L

REIL Rwys 6 and 24 L

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026