
WEAZL EIGHT DEPARTURE (RNAV)

CHARLOTTE DEP CON
120.05 307.8
AWOS-3
120.825
GCO
121.725


RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

TOP ALTITUDE: 3000

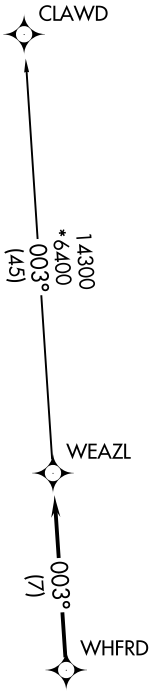

NOTE: Turbojet only.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.
NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.

TAKEOFF MINIMUMS
Rwy 6: 300-1¼ or standard with minimum climb of 268'/NM to 700.
Rwy 24: 300-1¼ or standard with minimum climb of 275'/NM to 700.



NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

Climb on assigned heading for vectors to WHFRD, then on depicted route to WEAZL, then on CLAWD Transition. Maintain 3000. Expect filed altitude 10 minutes after departure.

CLAWD TRANSITION (WEAZL8.CLAWD)

SE-2, 29 OCT 2026 to 26 NOV 2026
SE-2, 29 OCT 2026 to 26 NOV 2026