RNAV (GPS) RWY 18L

DENTON ENTERPRISE (DTO)

WAAS	APP CRS		18L	18R
CH 82143 W18A	177°	Rwy Ldg	6502	5003
		TDZE	642	643
		Apt Elev	643	643


RNP APCH-GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -9°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ⅞ SM, and LNAV Cats C and D to 1 SM.

MALSR


MISSED APPROACH: Climb to 1900 then climbing right turn to 4000 direct GREGS and hold.

ATIS	LONE STAR APP CON	DENTON TOWER ★	GND CON
119.325	118.1 306.95	119.95 (CTAF) L	123.95

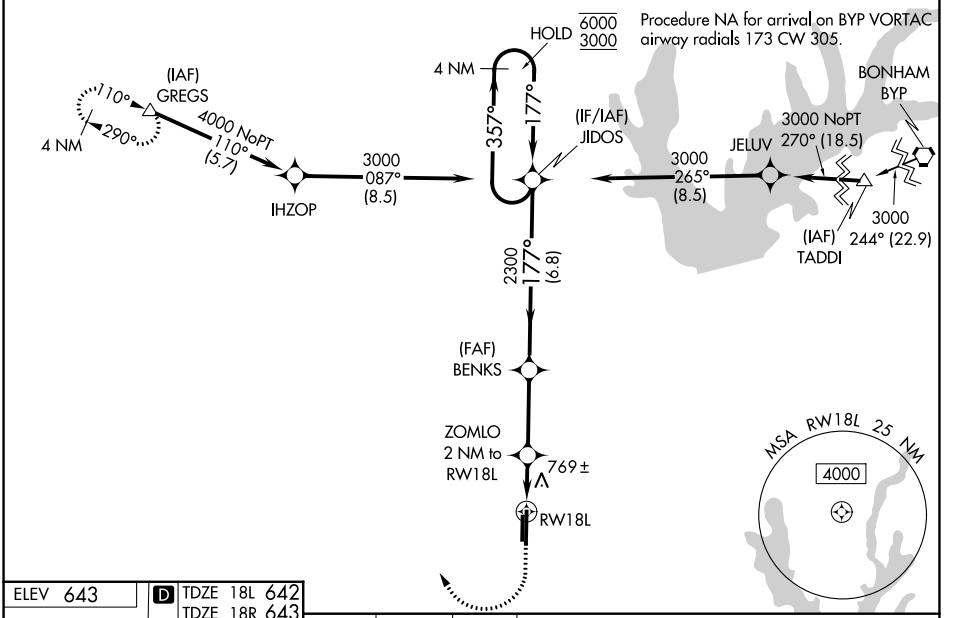

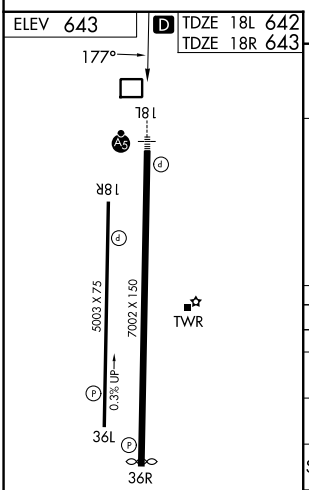

MIRL Rwy 18L-36R and 18R-36L L

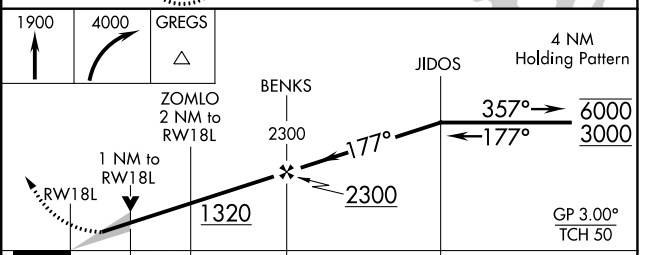

CATEGORY	A	B	C	D
LPV DA	842-½	200 (200-½)		
LNAV/VNAV DA	950-½	308 (400-½)		
LNAV MDA	1020-½ 378 (400-½)		1020-¾ 378 (400-¾)	
SIDESTEP 18R	1100-1 457 (500-1)		1100-1½ 457 (500-1½)	1100-2 457 (500-2)
CIRCLING	1100-1 457 (500-1)	1260-1 617 (700-1)	1380-2 737 (800-2)	1380-2¼ 737 (800-2¼)

SC-2, 29 OCT 2026 to 26 NOV 2026
SC-2, 29 OCT 2026 to 26 NOV 2026