# RNAV (GPS) RWY 22

CULPEPER RGNL (CJR)


| WAAS | APP CRS | Rwy Ldg | 5000 |
|---|---|---|---|
| CH 56306 | 218° | TDZE | 315 |
| W22A | | Apt Elev | 316 |

RNP APCH - GPS.

Rwy 22 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 48°C. Baro-VNAV and VDP NA when using IAD altimeter setting. When local altimeter setting not received, use IAD altimeter setting and increase LPV DA to 730 feet; increase LNAV/VNAV DA to 776 feet; increase all MDAs 80 feet and visibility Cats C ¼ SM and D ⅛ SM.

MISSED APPROACH: Climb to 3000 direct FAXIK and hold.

| AWOS-3PT | POTOMAC APP CON | CLNC DEL | UNICOM |
|---|---|---|---|
| 119.325 | 128.525 306.925 | 121.6 | 123.075 (CTAF) L |

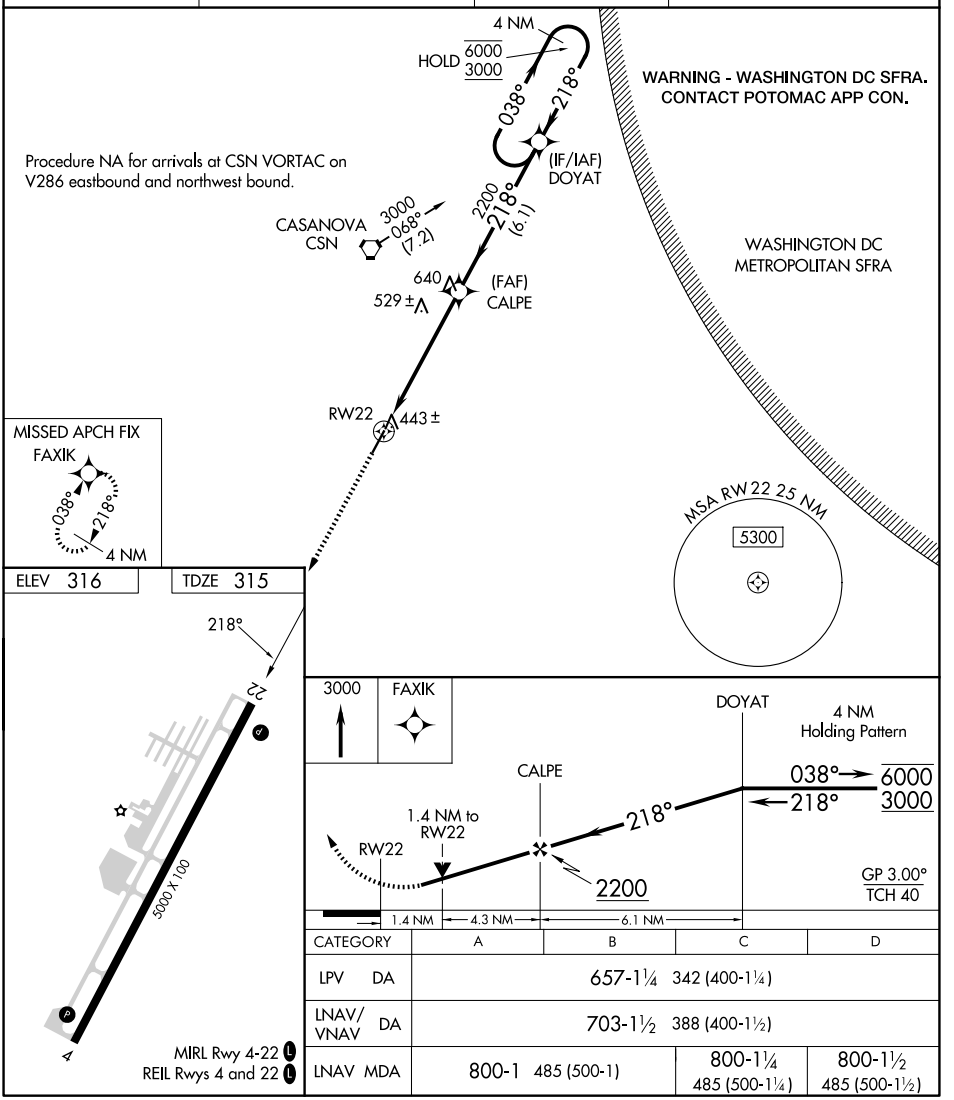


| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 657-1¼ 342 (400-1¼) | | | |
| LNAV/VNAV DA | 703-1½ 388 (400-1½) | | | |
| LNAV MDA | 800-1 485 (500-1) | | 800-1¼ 485 (500-1¼) | 800-1½ 485 (500-1½) |



NE-3, 29 OCT 2026 to 26 NOV 2026
NE-3, 29 OCT 2026 to 26 NOV 2026