RNAV (GPS) RWY 15

INDIANAPOLIS METRO (UMP)


WAAS	APP CRS	Rwy Ldg	3848
CH 86447	149°	TDZE	805
W15A		Apt Elev	811


RNP APCH - GPS.


Baro-VNAV and VDP NA when using IND altimeter setting. Rwy 15 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use IND altimeter setting and increase LPV DA to 1098 feet. Increase LNAV/VNAV DA to 1173 feet; increase all MDAs 60 feet and LNAV visibility Cat C ⅛ SM.

MISSED APPROACH: Climb to 2900 direct INOYO and hold.

AWOS-3PT	INDIANAPOLIS APP CON	UNICOM
119.375	127.15 317.8	123.0 (CTAF) L

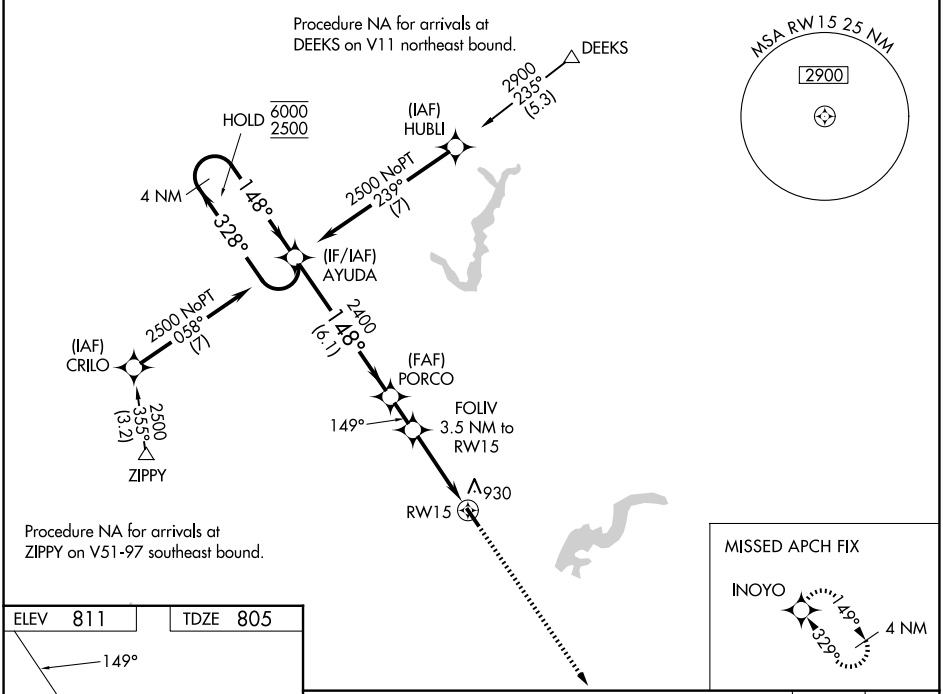

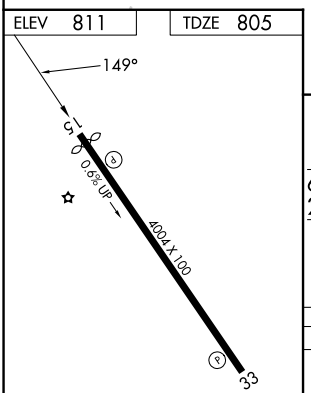

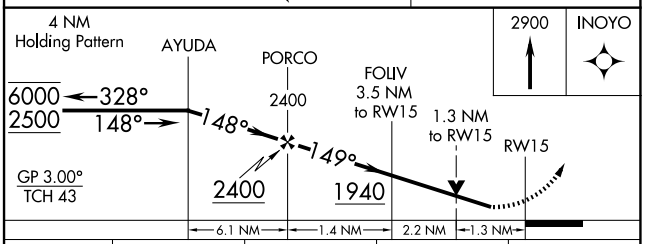

CATEGORY	A	B	C	D
LPV DA	1055-1 250 (300-1)			NA
LNAV/VNAV DA	1130-1 325 (400-1)			NA
LNAV MDA	1240-1 435 (500-1)		1240-1¼ 435 (500-1¼)	NA
CIRCLING	1320-1 509 (600-1)	1340-1 529 (600-1)	1340-1½ 529 (600-1½)	NA

MIRL Rwy 15-33 L
REIL Rwy 15 and 33 L

EC-2, 29 OCT 2026 to 26 NOV 2026
EC-2, 29 OCT 2026 to 26 NOV 2026