RNAV (GPS) RWY 35

HURON COUNTY MEML (BAX)


WAAS CH 62805 W35A	APP CRS 350°	Rwy Ldg 5000 / TDZE 756 / Apt Elev 763


RNP APCH.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS Intl altimeter setting and increase all DA 129 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cat C visibility 3/8 mile. Rwy 35 helicopter visibility reduction below 3/4 SM NA. VDP and Baro/VNAV NA when using MBS Intl altimeter setting.

MISSED APPROACH: Climb to 3000 direct ELARE and hold.

AWOS-3P	CLEVELAND CENTER	UNICOM
118.6	127.7 290.425	123.075 (CTAF) L

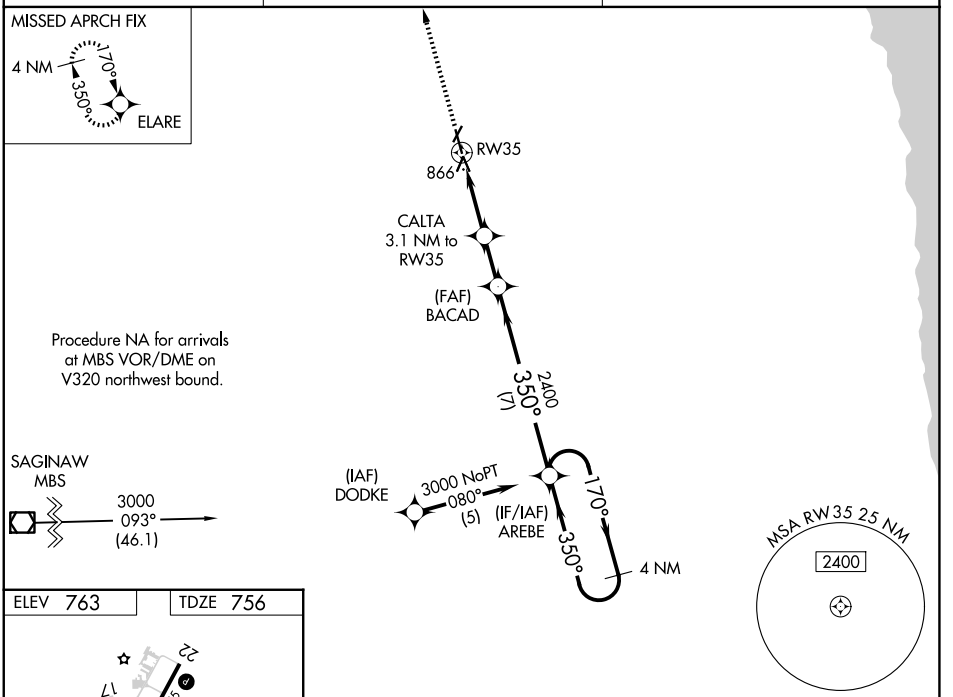

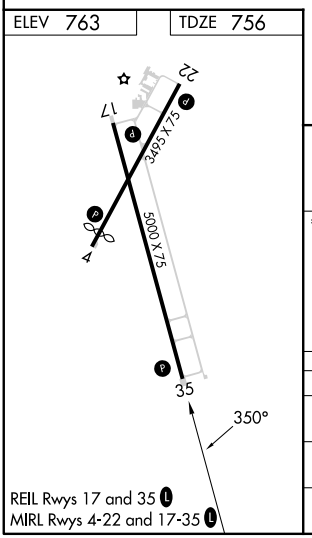

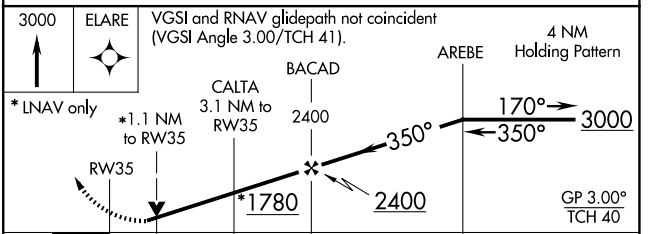

CATEGORY	A	B	C	D
LPV DA	1113-1¼ 357 (400-1¼)			NA
LNAV/VNAV DA	1154-1½ 398 (400-1½)			NA
LNAV MDA	1520-1 764 (800-1)	1520-1¼ 764 (800-1¼)	1520-2½ 764 (800-2½)	NA

EC-1, 29 OCT 2026 to 26 NOV 2026
EC-1, 29 OCT 2026 to 26 NOV 2026