RNAV (GPS) RWY 1

LEBANON MUNI (M54)


WAAS	APP CRS		
CH **65809**	**009°**	Rwy Idg	**4527**
W01A		TDZE	**583**
		Apt Elev	**588**


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using XNX altimeter setting. Rwy 1 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 4 and 22. When local altimeter setting not received, use XNX altimeter setting: increase LPV DA to 1121 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1433 feet; increase all MDAs 40 feet and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct LATGE and hold.


AWOS-3	NASHVILLE APP CON	UNICOM
118.325	**118.4 360.7**	**122.725** (CTAF)

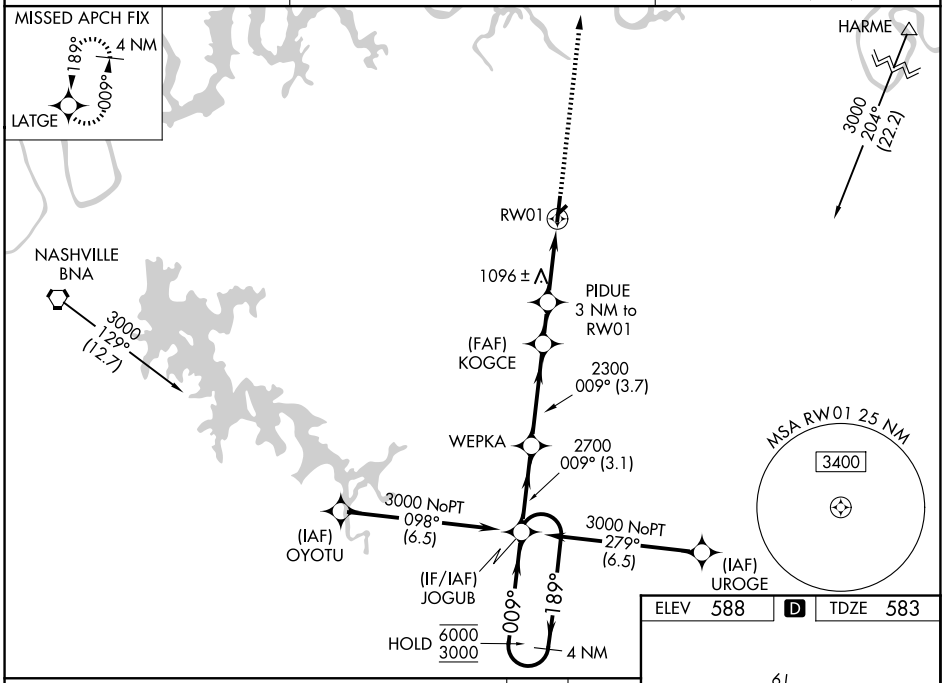

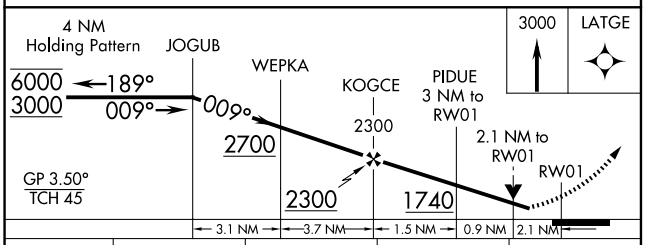

CATEGORY	A	B	C	D
LPV DA	901-1 318 (400-1)			
LNAV/VNAV DA	1400-2½ 817 (900-2½)			
LNAV MDA	1400-1 817 (900-1)	1400-1¼ 817 (900-1¼)	1400-2½ 817 (900-2½)	
CIRCLING	1400-1¼ 812 (900-1¼)		1440-2½ 852 (900-2½)	1520-3 932 (1000-3)

ELEV 588 D TDZE 583

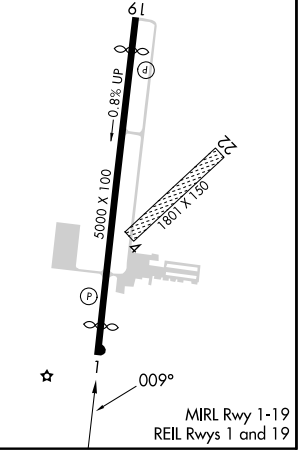

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026