RNAV (GPS) RWY 19

LEBANON MUNI (M54)

WAAS	APP CRS	Rwy Ldg	4500
CH 90309	189°	TDZE	572
W19A		Apt Elev	588


RNP APCH - GPS.


T A


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using XNX altimeter setting. Rwy 19 helicopter visibility reduction below ¾ SM NA. Circling NA to Rwys 4 and 22. When local altimeter setting not received, use XNX altimeter setting: increase LPV DA to 936 feet; increase LNAV/VNAV DA to 1033 feet and all visibilities ⅛ SM; increase all MDAs 40 feet, LNAV visibility Cat C and D ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 3000 direct JOGUB and hold.

AWOS-3	NASHVILLE APP CON	UNICOM
118.325	118.4 360.7	122.725 (CTAF)

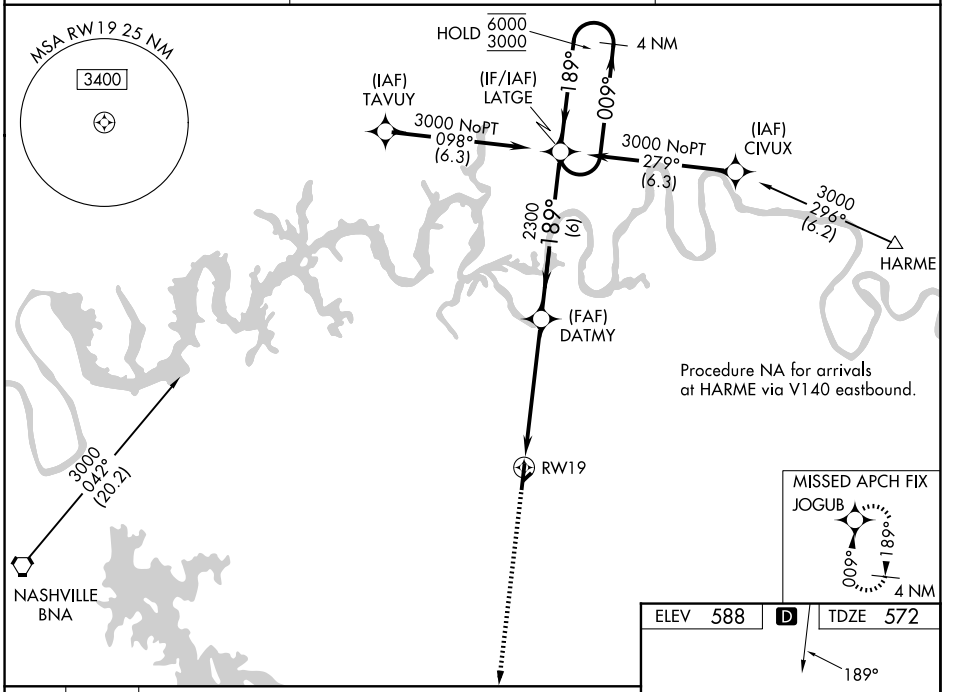

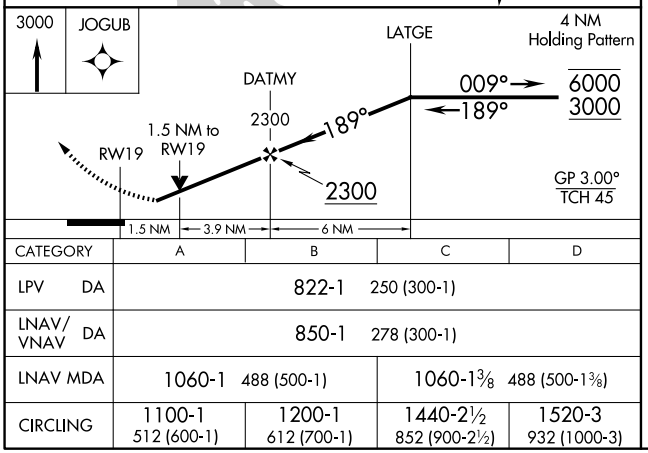

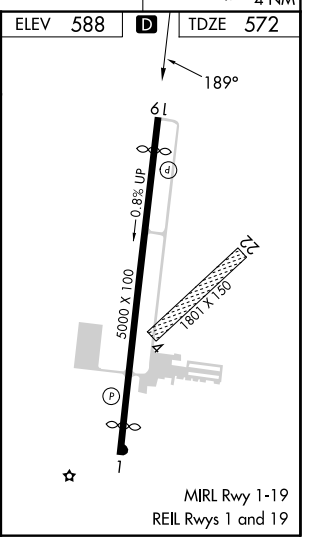

CATEGORY	A	B	C	D
LPV DA	822-1 250 (300-1)			
LNAV/VNAV DA	850-1 278 (300-1)			
LNAV MDA	1060-1 488 (500-1)		1060-1⅜ 488 (500-1⅜)	
CIRCLING	1100-1 512 (600-1)	1200-1 612 (700-1)	1440-2½ 852 (900-2½)	1520-3 932 (1000-3)

SE-1, 29 OCT 2026 to 26 NOV 2026
SE-1, 29 OCT 2026 to 26 NOV 2026